


MWP2

DISCONTINUED

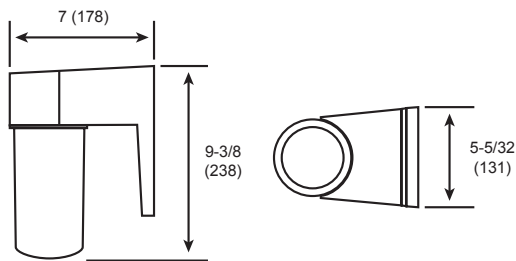

Specifications: MWP2

Height: 9-3/8 (238)
 Width: 5-5/32 (131)
 Depth: 7 (178)

All dimensions are in inches (millimeters).

LAMP CONFIGURATIONS	
CFL	HID
113	H35
213	H50



APPLICATION

This compact cylinder type pillar mini wall pack is ideal for both commercial and residential applications with wall mounting height requirements of 14 feet and below. Ideal for building entrances or walkways with wall mounting.

FEATURES:

- Injection-molded polycarbonate front housing with a steel backplate.
- High impact polycarbonate (with UV) prismatic clear diffuser.
- Silicone rubber gasket between backplate and front cover for wet locations.
- Dark bronze finish is standard; white or black finish is also available.
- Optional photo control available.

MOUNTING:

- Wall mounting.
- Easily installed on recessed junction boxes or on direct mounts to the wall.

LAMP:

- 1 or 2 compact fluorescent 13W (twin-tube) 2-pin socket lamps.
- HPS lamp option also available. Lamps will have medium base porcelain socket with screw shell and center contact.
- Lamp included.

ELECTRICAL:

- Compact fluorescent lamps use a 120V magnetic ballast and sound rate A.
- HPS ballast use a standard normal power factor ballast 120V only.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant (optional).

ORDERING INFORMATION

EXAMPLE: MWP2-113-120-BZ

MODEL	LAMP TYPE		VOLTAGE		FINISH	
MWP2	113	(1) 13W Compact Fluorescent	120	120V	BZ	Dark Bronze (Std.)
	213	(2) 13W Compact Fluorescent	277	277V	WH	White
	H35	35W High Pressure Sodium ¹	UNV	120-277V ²	BK	Black
	H50	50W High Pressure Sodium ¹			Available custom color (RAL) Please provide us with the RAL number.	

OPTIONS

F1	Single Fuse (120, 277 or 347V only) ³	PC2	With Photocell - Button Type 277V
F2	Double Fuse (208, 240 or 480V only) ³	NPC	Without Photocell - button type
PC1	With Photocell - Button Type 120V (Std.)	ARRA	Assembled in USA for Buy American Act

NOTES:

1. 120V only.
2. Multi-voltage ballast for compact fluorescent (120-277V).
3. Must specify voltage.