

LEDCXTEU

Project Name:

Type:



-NH model



APPLICATION

Injection-molded, engineering-grade, 5VA flame retardant, high-impact, thermoplastic housing with LED exit and LED emergency light. Unique new design EXIT sign with LED emergency lights in low profile housing.

FEATURES:

- Energy efficient LED, Long lasting, efficient ultra-bright white LEDs.
- High-performance chrome-plated metalized reflector and polycarbonate lens for optimal light distribution.
- Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.
- Long-lasting, energy efficient red or green LED exit sign.
- Easily removable chevron directional indicators. Unique design allows double face conversion in the field. Quick-snap face plate closure.
- Single or double face configuration. Available in white or black housing.

MOUNTING:

- Universal knockout pattern on back for wall mount.
- EZ-snap mounting canopy included for top or end mount.

ELECTRICAL:

- 120/277V dual voltage operation standard.
- Charge rate and power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.

LAMPS:

- 1.0 Watt (8 LEDs x 0.125W) per head.
- 45 lumens per head.

BATTERY:

- 9.6V Long life, maintenance-free, rechargeable NiCd battery.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 90minute emergency illumination.
- LVD (Low Voltage Disconnection) prevents battery from deep discharge.

OPTION:

- SDT: Self-diagnostic, continually diagnoses unit's performance and test system (auto battery discharge once every 30 days and once every 12 months) to ensure reliable operation and to meet electrical and life safety code.
- RC: Remote capacity of up to 3.0 Watts, remote head not included.
- HL: 12-LED heads provide increased center-to-center spacing (1.5W per head).
- NH: No lamp head attach to the unit enabling it to be used as remote capable exit sign.
- CUS: Signs available with requested "special" wording.

LISTING:

- 5 years limited warranty on materials and all electronics. Battery pro rated for five years.
- LED lamps are 5 years limited warranty.
- UL listed for damp locations (32°F~104°F / 0°C~ 40°C standard).
- Meets UL924, National Electrical Code, NFPA 70 and the Life Safety Code, NFPA 101.
- ARRA compliant. (optional)

ORDERING INFORMATION


EXAMPLE: LEDCXTEU-2-G-W

MODEL	# OF FACE	LETTER	HOUSING COLOR	OPERATION	OPTIONS
LEDCXTEU	2 Universal for single or double face	R G Red Green	W B White Housing Black Housing	(Blank) Battery Back up	WG-3 Steel Wire Guard (13.5" x 30" x 6") BG-3 Polycarbonate Vandal Shield Guard (15" x 30.5" x 7") SDT Self-diagnostics HL 12 LED Head RC Remote Capable NH No Lamp Heads CUS Custom Wording ARRA Assembled in USA for ARRA and BAA compliant

NOTE:

RC : Can connect to two additional LED heads; not included

LEDCXTEU

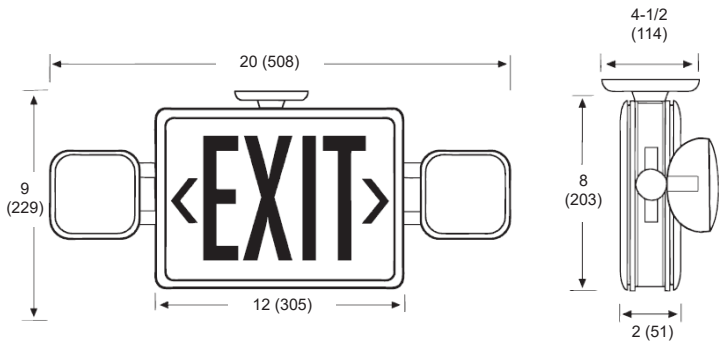

All dimensions are in inches (millimeters).

ELECTRICAL INFORMATION

	Supply Voltage	Max. Watts	Max. Amps
Red	120V/277V	3.8W	0.04A
Green		3.2W	0.03A
Red-RC		3.6W	0.033A
Green-RC		3.2W	0.03A
Red-SDT		5.7W	0.046A
Green-SDT		5.4W	0.046A
Red-RCSDT		5.6W	0.046A
Green-RCSDT		5.4W	0.044A