



ARL5 Discontinued

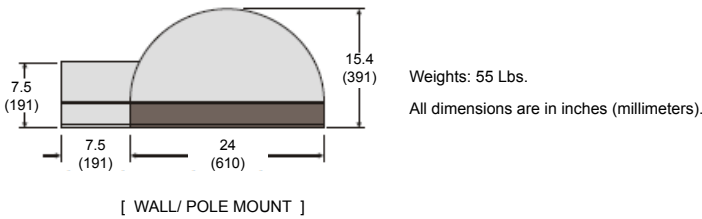

APPLICATION

Architectural area lighting, heavy duty die-cast aluminum housing, segmented aluminum design reflector for the best light efficiency. Use on walkways, parking areas and street lighting.

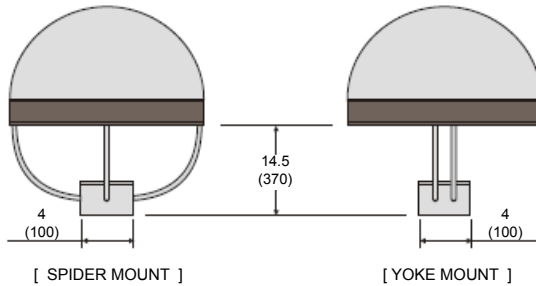

FEATURES:

- Heavy duty die-cast aluminum housing and door frame.
- Housing is dark bronze polyester powder paint finish standard. Also available in other finish.
- Fully sealed with silicone foam gasket to prevent any leakage from the outside.
- Heat and impact resistant tempered glass lens.
- Segmented aluminum design reflector.
- Complete stainless steel external hardware.
- Removable door assembly for easy maintenance door latch system. Air craft cable for extra safety system.

MOUNTING:

- Provided aluminum arm for square pole mounting standard (AM). Other mount available: Spider mount (SP), Yoke mount (YM) and Wall mount (WM) bracket.

LAMP:

- Horizontally oriented, mogul base, porcelain socket with screw shell and center contact.
- Lamp included.

ELECTRICAL:

- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant.

ORDERING INFORMATION

EXAMPLE: ARL5-M250PS-T2-QT-BK

MODEL		LAMP TYPE		BALLAST		DISTRIBUTION					
ARL5	M150	150W Metal Halide	(Blank)	Standard Pulse Start MH ¹	T5	Type V, Square					
	M175	175W Metal Halide									
	M250	250W Metal Halide									
	M400	400W Metal Halide	PS								
	H150	150W High Pressure Sodium		SCWA							
	H250	250W High Pressure Sodium									
H400	400W High Pressure Sodium										
VOLTAGE		FINISH		MOUNTING		OPTIONS					
120	120V	BZ	Dark Bronze (Std.)	PM	Pole Mount	F1	Single Fuse (120, 277 or 347V only) ³				
208	208V			SP	Spider Mount	F2	Double Fuse (208, 240 or 480V only) ³				
240	240V			WH	White	YM	Yoke Mount	PC1	With Photocell - Button Type 120V		
277	277V					BK	Black	WM1	Wall Mount	PC2	With Photocell - Button Type 277V
347	347V							QR	Quartz Restrike System ⁴		
480	480V	Available custom color (RAL) Please provide us with the RAL number.									
QT	120/208/240/277V										

NOTES:

1. Pulse start metal halide available on 150, 175, 250 and 400W only.
2. Super CWA available on 150, 175, 250 and 400W only.
3. Must specify voltage.
4. 120V or 277V only.

OUTDOOR LIGHTING