



APPLICATION

The borosilicate glass lensed wall pack is ideal for commercial and residential applications with wall mounting. Use on factories, warehouses, self storage, commercial buildings, entrances, walkways and loading docks.

FEATURES:

- Die-cast aluminum housing and hinged door frame with prismatic borosilicate glass lens refractor.
- Door frame holds lens and seals to housing gasket with two stainless steel screws.
- Housing with 1/2" feed-through hubs provided.
- Housing has silicone gasket to seal to lens for wet location.
- Dark bronze powder finish is standard; white or black finish is also available.

MOUNTING:

- Wall mounting only.
- Easily installed on recessed junction boxes or on direct mounts to the wall with feed thru 1/2" conduit access.

REFLECTOR & COVER:

- Anodized specular aluminum reflector with high efficiency and wide beam spread.
- Heat and impact resistant tempered clear prismatic glass lens.

LAMP:

- Vertical lamp position, HID lamps have medium base (E26) or mogul base (E39) porcelain socket with screw shell and center contact.
- Lamp included.

ELECTRICAL:


- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant (optional).

Discontinued

**CLWP
LWP1**

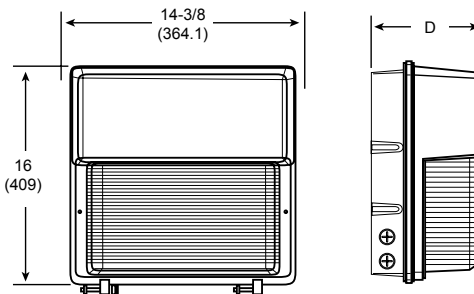

Specifications: CLWP

Height: 14-3/8 (364.1)
Width: 16 (409)
Depth: 7-1/8 (181.5)

Specifications: LWP1

Height: 14-3/8 (364.1)
Width: 16 (409)
Depth: 9-3/4 (249)

All dimensions are in inches (millimeters).

LAMP CONFIGURATIONS

	HID	DEPTH
CLWP	M100, M150, M175, M250 H70, H100, H150, H250	7-1/8"
LWP1	M250, M320, M350, M400 H250, H400	9-3/4"

ORDERING INFORMATION

EXAMPLE: LWP1-M250-QT-BZ

MODEL		LAMP TYPE				VOLTAGE	
CLWP	M100	100W Metal Halide	H100	100W High Pressure Sodium	(Blank) PS SCWA	Standard Pulse Start ² Super CWA Pulse Start Ballast ³	
LWP1	M150	150W Metal Halide	H150	150W High Pressure Sodium			
	M175	175W Metal Halide	H175	175W High Pressure Sodium			
	M250	250W Metal Halide	H250	250W High Pressure Sodium			
	M400	400W Metal Halide	H400	400W High Pressure Sodium			
VOLTAGE		FINISH		OPTIONS			
120	120V	BZ WH BK	Dark Bronze (Std.) White Black Available custom color (RAL) Please provide us with the RAL number.	F1	Single Fuse (120, 277 or 347V only) ⁴		
208	208V			F2	Double Fuse (208, 240 or 480V only) ⁴		
240	240V			PC1	With Photocell - Button Type 120V		
277	277V			PC2	With Photocell - Button Type 277V		
347	347V			ARRA	Assembled in USA for Buy American Act		
480	480V						
QT	120/208/240/277V						

NOTES:

1. Up to 250W lamp type.
2. For pulse start metal halide.
3. Super CWA available on metal halide 150, 175, 250 and 400W only.
4. Must specify voltage.