



CRDL3 CRDL4

DISCONTINUED



APPLICATION

The round canopy luminaire provides a wide and even symmetrical light distribution. Use for safety or security location of parking areas, walkways and underpasses.

FEATURES:

- Injection molded high impact UV stabilized prismatic polycarbonate lens.
- Cold rolled steel back plate, white polyester powder coated finish.
- Housing has silicone gaskets secure the seal between the lenses and the housing.
- Available tamper resistant screw as option.

MOUNTING:

- Wet locations for wall mount and covered ceiling applications.

LENS:

- Injection molded high impact UV stabilized prismatic polycarbonate lens.
- Polycarbonate lenses will protect the light source against abuse, such as severe impact and vandalism.

LAMP:


- Compact fluorescent lamp, 2-pin or 4-pin, single or double lamp option available.
- Lamp included.

ELECTRICAL:

- The compact fluorescent lamps use a multi-voltage (120-277V) electronic, programmed start and high power factor ballast.
- The compact fluorescent lamps use magnetic ballasts for 9W and 13W preheat lamps normal ballast factor 120V.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant (optional).

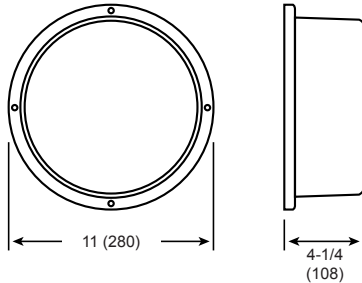

Specifications: CRDL3

Height: 4-1/4 (105)
Diameter: 11 (280)

Specifications: CRDL4

Height: 4-7/8 (124)
Diameter: 15 (380)

All dimensions are in inches (millimeters).

CONFIGURATIONS

CRDL3	(1 or 2) CF9, (1 or 2) CF13, (1 or 2) CF18, (1 or 2) CF26, (1) CF32, (1) CF42
CRDL4	(1 or 2) CF13, (1 or 2) CF18, (1 or 2) CF26, (1 or 2) CF32, (1 or 2) CF42

ORDERING INFORMATION

EXAMPLE: CRDL3-126DTT-UNV

MODEL	# OF LAMPS	LAMP TYPE ¹	LAMP SOURCE
CRDL3 11" Dia. Housing	1 2	9 CF9, 2-Pin	STT Single Twin Tube ² DTT Double Twin Tube ³ TRT Triple Tube ⁴
		13 CF13, 4-Pin	
		18 CF18, 4-Pin	
		26 CF26, 4-Pin	
CRDL4 15" Dia. Housing	32 42	32 CF32, 4-Pin	
		42 CF42, 4-Pin	
VOLTAGE		OPTIONS	
120 277 UNV	120V 277V 120-277V	TR ARRA	Tamper Resistant Screw Assembled in USA for Buy American Act

NOTES:

1. See lamp configuration table.
2. STT: 9W and 13W
3. DTT: 13W, 18W and 26W
4. TRT: 26W, 32W and 42W