


CWP1

DISCONTINUED



APPLICATION

This compact wall pack is ideal for both commercial and residential applications with wall mounting height requirements of 14 feet and below.

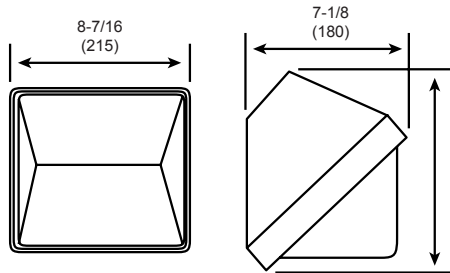

Specifications: CWP1

Height: 8-7/8 (226)
Width: 8-7/16 (215)
Depth: 7-1/8 (180)

All dimensions are in inches (millimeters).

LAMP CONFIGURATIONS

CFL	HID
126	M35, M50, M70
132	H35, H50, H70, H100
142	

FEATURES:

- Injection-molded polycarbonate diffuser and die-cast aluminum housing with 1/2" hub.
- Silicone rubber gasket between backplate and front cover for wet locations.
- Dark bronze finish is standard; white or black finish is also available.
- Optional photocell for dusk to dawn.

MOUNTING:

- Wall mounting only.
- Easily installed on recessed junction boxes or on direct mounts to the wall with feed through 1/2" conduit access.

REFLECTOR & COVER:

- Anodized specular aluminum reflector with high efficiency and wide beam spread.
- High impact polycarbonate clear prismatic diffuser.

LAMP:

- Compact fluorescent lamp GX24q base, 4-pin; single lamp option available. (TRT)
- HID lamps will have medium base (E26) porcelain socket with screw shell and center contact.
- Lamp included.

ELECTRICAL:

- The compact fluorescent lamps use a multi-voltage (120-277V) electronic high power factor ballast with ambient operating temperature of -20°F (-30°C) system.
- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system. 35W HPS 120V normal ballast factor only.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant (optional).

ORDERING INFORMATION

EXAMPLE: CWP1-M70-QT-BZ

MODEL	LAMP TYPE			VOLTAGE		
CWP1	M35	35W Metal Halide ¹	126	(1) CF26 DTT, 4-Pin	120	120V
	M50	50W Metal Halide		(1) CF32 TRT, 4-Pin	208	208V
	M70	70W Metal Halide		(1) CF42 TRT, 4-Pin	240	240V
	H35	35W High Pressure Sodium ¹	132	(1) CF42 TRT, 4-Pin	277	277V
	H50	50W High Pressure Sodium ¹			QT	120/208/240/277V
	H70	70W High Pressure Sodium			UNV	120-277V ²
	H100	100W High Pressure Sodium ¹				
FINISH		OPTIONS				
BZ	Dark Bronze (Std.)	F1	Single Fuse (120, 277 or 347V only) ³			
WH	White	F2	Double Fuse (208, 240 or 480V only) ³			
BK	Black	PC1	With Photocell - Button Type 120V			
	Available custom color (RAL) Please provide us with the RAL number.	PC2	With Photocell - Button Type 277V			
		ARRA	Assembled in USA for Buy American Act			

NOTES:

1. 120V only.
2. Multi-voltage ballast for compact fluorescent (120/277V).
3. Must specify voltage.