


CWP3

DISCONTINUED



APPLICATION

The rugged, die-cast aluminum housing and semi cut-off compact wall pack is ideal for both commercial and residential applications with wall mounting height requirements of 12 feet and below. Ideal for building entrances and walkways.

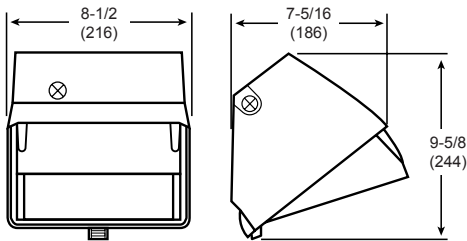

Specifications: CWP3

Height: 9-5/8 (244)
 Width: 8-1/2 (216)
 Depth: 7-15/16 (186)

All dimensions are in inches (millimeters).

FEATURES:

- Rugged die-cast aluminum housing and door frame.
- Die-cast aluminum housing with 1/2" hub; button photocell can be field installed.
- Silicone rubber gasket to seal between backplate and front cover for wet locations.
- Dark bronze finish is standard; white or black finish is also available.
- Optional photocell for dusk to dawn.

MOUNTING:

- Wall mounting.
- Easily installed on recessed junction boxes or on direct mounts to the wall with feed thru 1/2" conduit access.

REFLECTOR & COVER:

- Anodized specular aluminum reflector with high efficiency and wide beam spread.
- Heat and impact resistant tempered frost textured glass lens.

LAMP:

- Compact fluorescent lamp GX24q base, 4-pin; single lamp option.
- HID lamps will have medium base (E26) porcelain socket with screw shell and center contact.
- Lamp included.

ELECTRICAL:

- Compact fluorescent lamps use a multi-voltage (120-277V) electronic, high power factor ballast with ambient operating temperature of -20°F (-30°C) system.
- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant (optional).

LAMP CONFIGURATIONS		
	CFL	HID
CWP3	113, 118, 126, 132, 142	M50, M70, M100 H50, H70, H100, H150

ORDERING INFORMATION

EXAMPLE: CWP3-M70-QT-BZ

MODEL	LAMP TYPE				LAMP SOURCE	
CWP3	M50	50W Metal Halide	113	(1) CF13 DTT, 4-Pin	(Blank)	Standard Pulse Start ²
	M70	70W Metal Halide	118	(1) CF18 DTT, 4-Pin		
	M100	100W Metal Halide	126	(1) CF26 DTT, 4-Pin		
			126T	(1) CF26 TRT, 4-Pin		
	H50	50W High Pressure Sodium ¹	132T	(1) CF32 TRT, 4-Pin		
	H70	70W High Pressure Sodium	142T	(1) CF42 TRT, 4-Pin		
	H100	100W High Pressure Sodium				
	H150	150W High Pressure Sodium ¹				
					PS	
	VOLTAGE		FINISH		OPTIONS	
120	120V	WH	White (Std.)	F1	Single Fuse (120, 277 or 347V only) ³	
208	208V	BZ	Dark Bronze	F2	Double Fuse (208, 240 or 480V only) ³	
240	240V	BK	Black	PC1	With Photocell - Button Type 120V	
277	277V			PC2	With Photocell - Button Type 277V	
QT	120/208/240/277V		Available custom color (RAL)	ARRA	Assembled in USA for Buy American Act	
UNV	120-277V ³		Please provide us with the RAL number.			

NOTES:

1. 120V only.
2. Pulse start MH available on 70 and 100 only.
3. Multi-voltage ballast for compact fluorescent (120-277V).
4. Must specify voltage.