

# DWP2 DWP2L

Project Name:	
Type:	



**APPLICATION**

The full cut-off wall pack is ideal for both commercial applications with wall mounting. Use on factories, warehouses, self storage, commercial buildings, entrances, walkways and loading docks.

**FEAT URES:**

- Full cut-off dark sky compliant fixtures.
- Die-cast aluminium housing and hinged door frame. Door frame holds lens and seals housing gasket.
- Housing with 1/2" feed-through hubs provided.
- Housing has silicone gasket to seal to lens for wet location.
- Dark bronze finish is standard; white or black finish is also available.

**MOUNTING:**

- Wall mounting only.
- Easily installed on recessed junction boxes or on direct mounts to the wall with feed thru 1/2" conduit access.

**REFLECTOR & COVER:**

- Anodized aluminum reflector with high efficiency and wide beam spread.
- Heat and impact resistant tempered frost textured glass lens.

**LAMP:**


- HID lamps will have medium base (E26) or mogul base (E39) porcelain socket with screw shell and center contact.
- Compact fluorescent lamp GX24q, 4-pin base; one or two lamps option.
- Lamp included.

**ELECTRICAL:**

- Compact fluorescent lamps use a multi-voltage (120-277V) electronic, sound rate A, high power factor ballast ambient operating temperature of -20°F (-30°C).
- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system.

**LISTING:**

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant (optional).

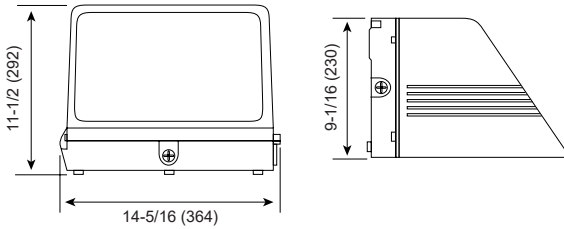

Specifications: DWP2

Height: 9-1/16 (230)  
Width: 14-5/16 (364)  
Depth: 11-1/2 (292)  
Weight: 12.35 lbs (5.6 kg)

Specifications: DWP2L

Height: 9-1/16 (230)  
Width: 18-1/4 (463)  
Depth: 13-3/4 (350)  
Weight: 16.09 lbs (7.3 kg)

All dimensions are in inches (millimeters).

**LAMP CONFIGURATIONS**

	HID	CFL
DWP2	M50, M70, M100, M150, M175	142
	H50, H70, H100, H150	242
DWP2L	M175, M250	142
	H150, H250	242

**ORDERING INFORMATION**

**EXAMPLE: DWP2-M175-QT-BZ**

MODEL	LAMP TYPE				BALLAST		VOLTAGE		FINISH	
DWP2 DWP2L <sup>1</sup>	M50	50W Metal Halide	H50	50W High Pressure Sodium <sup>2</sup>	(Blank)	Standard	UNV	120-277V <sup>4</sup>	BZ	Dark Bronze (Std.)
	M70	70W Metal Halide	H70	70W High Pressure Sodium	PS	Pulse Start <sup>2</sup>	120	120V	WH	White
	M100	100W Metal Halide	H100	100W High Pressure Sodium	SCWA	Super CWA	208	208V	BK	Black
	M150	150W Metal Halide	H150	150W High Pressure Sodium		Pulse Start Ballast <sup>3</sup>	240	240V		
	M175	175W Metal Halide	H250	250W High Pressure Sodium			277	277V		
	M250	250W Metal Halide					347	347V		
			142	(1) CF42 TRT, 4-Pin			480	480V		
			242	(1) CF42 TRT, 4-Pin			QT	120/208/240/277V		

<sup>1</sup> Available custom color (RAL). Please provide us with the RAL number.

OPTIONS			
F1	Single Fuse (120, 277 or 347V only) <sup>5</sup>	EM	Emergency Ballast <sup>6</sup>
F2	Double Fuse (208, 240 or 480V only) <sup>5</sup>	EMC	CEC compliant EM <sup>7</sup>
PC1	With Photocell - Button Type 120V	ARRA	Assembled in USA for Buy American Act
PC2	With Photocell - Button Type 277V	BG	Bird Guard, Stainless Steel Spikes

**NOTES:**

- Maximum up to 250W only.
- Pluse start MH available on 70, 100, 150, 175 and 250 only.
- Super CWA available on 150, 175 and 250 only.
- Multi-voltage ballast for compact fluorescent (120-277V).
- Must specify voltage.
- Only for compact fluorescent unit. (Emergency Ballast options, see page 390).
- Check with factory for more details.