

# DWP3 LWP4

Project Name:	
Type:	



**APPLICATION**

The semi cut-off wall pack is ideal for both commercial applications with wall mounting. Use on factories, warehouses, self storage, commercial buildings, entrances, walkways and loading docks.

**FEATURES:**

- Die-cast aluminum housing and hinged door frame.
- Door frame holds lens and seals housing gasket.
- Housing with 1/2" feed-through hubs provided.
- Housing has silicone gasket to seal to lens for wet location.
- Dark bronze finish is standard; white or black finish is also available.

**MOUNTING:**

- Wall mounting only.
- Easily installed on recessed junction boxes or on direct mounts to the wall with feed through 1/2" conduit access.

**REFLECTOR & COVER:**

- Anodized specular aluminum reflector with high efficiency and wide beam spread.
- Heat and impact resistant tempered frost textured glass lens.

**LAMP:**


- HID lamps will have medium base (E26 BD/ED17) porcelain socket with screw shell and center contact.
- Compact fluorescent lamp GX24q, 4-pin base; one or two lamps option.
- Lamp included.

**ELECTRICAL:**

- Compact fluorescent lamps use a multi-voltage (120-277V) electronic, sound rate A, high power factor ballast ambient operating temperature of -20°F (-30°C).
- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system.


**LISTING:**

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant (optional).

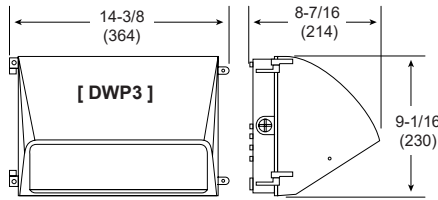

**Specifications: DWP3**

Height: 9-1/16 (230)  
Width: 14-3/8 (364)  
Depth: 8-7/16 (214)  
Weight: 10.8 lbs (4.9 kg)

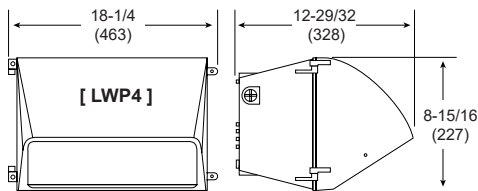

**Specifications: LWP4**

Height: 8-15/16 (227)  
Width: 18-1/4 (463)  
Depth: 12-29/32 (328)  
Weight: 13.25 lbs (6.01 kg)

All dimensions are inches (millimeters).

**LAMP CONFIGURATIONS**

	HID	CFL
DWP3	M50, M70, M100, M150, M175	142
	H50, H70, H100, H150	242
DWP3L	M250, M400	142
	H250, H400	242

**ORDERING INFORMATION**

**EXAMPLE: DWP3-M175-QT-BZ**

MODEL	LAMP TYPE		BALLAST		VOLTAGE		FINISH		
DWP3 LWP4	<b>M50</b>	50W Metal Halide	<b>H50</b>	50W High Pressure Sodium <sup>1</sup>	<b>(Blank)</b> <b>PS</b> <b>SCWA</b>	<b>Standard</b> Pulse Start <sup>2</sup> Super CWA Pulse Start Ballast <sup>3</sup>	<b>UNV</b> <b>120</b> <b>208</b> <b>240</b> <b>277</b> <b>347</b> <b>480</b> <b>QT</b>	<b>BZ</b> <b>WH</b> <b>BK</b>	Dark Bronze (Std.) White Black
	<b>M70</b>	70W Metal Halide	<b>H70</b>	70W High Pressure Sodium					
	<b>M100</b>	100W Metal Halide	<b>H100</b>	100W High Pressure Sodium					
	<b>M150</b>	150W Metal Halide	<b>H150</b>	150W High Pressure Sodium					
	<b>M175</b>	175W Metal Halide	<b>H250</b>	250W High Pressure Sodium					
	<b>M250</b>	250W Metal Halide	<b>H400</b>	400W High Pressure Sodium					
	<b>M400</b>	4000W Metal Halide							
		<b>142T</b>	(1) CF42 TRT, 4-Pin						
		<b>242T</b>	(1) CF42 TRT, 4-Pin						

<sup>4</sup> Available custom color (RAL). Please provide us with the RAL number.

OPTIONS			
<b>F1</b>	Single Fuse (120, 277 or 347V only) <sup>5</sup>	<b>EM</b>	Emergency Ballast <sup>6</sup>
<b>F2</b>	Double Fuse (208, 240 or 480V only) <sup>5</sup>	<b>EMC</b>	CEC compliant EM <sup>7</sup>
<b>PC1</b>	With Photocell - Button Type 120V	<b>ARRA</b>	Assembled in USA for Buy American Act
<b>PC2</b>	With Photocell - Button Type 277V	<b>BG</b>	Bird Guard, Stainless Steel Spikes

**NOTES:**

1. 120V only.
2. Pulse start MH available on 70, 100, 150, 175, 250 and 400 only.
3. Super CWA available on 150, 175, 250 and 400 only.
4. Multi-voltage ballast for compact fluorescent (120-277V).
5. Must specify voltage.
6. Only for compact fluorescent unit. (Emergency Ballast options, see page 390).
7. Check with factory for more details.