


ECL

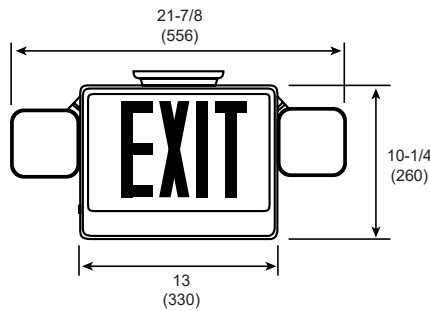

All dimensions are in inches (millimeters).

APPLICATION

Ideal for commercial where economy, appearance and the ultimate ease of installation and maintenance are desired. A combination exit and emergency incandescent lighting unit in one clean, low-profile modern design. Standard with two fully adjustable, glare-free incandescent emergency lighting heads.

FEATURES:

- Thermoplastic LED Exit Sign Compact size low-profile design LED exit sign.
- Innovative, snap-together design allows for fast and easy installation. Two fully adjustable glare-free square shape light heads for emergency light.
- Letters 6" height with 3/4" stroke.
- Easily removable snap-out knockouts and chevron directional arrows.
- Single or double face configuration.
- 90+ minute emergency operation.
- Available in white or black housing.
- Bug eyes are adjustable vertically.

MOUNTING:

- Universal (wall or ceiling) mounting.
- Universal knockouts on back plate allow for wall mounting directly to standard J-Box.
- Canopy and mounting hardware provided.

ELECTRICAL:

- 120/277V dual voltage operation standard.
- Charge rate and power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.

LAMPS:

- Emergency light for 2 pcs x 6V 5.4 watts DC T5 wedge base lamps for emergency mode.
- Exit for 3.8 watts at normal operation, 15 watts at emergency operation.
- LEDs mounted on print circuit board.
- LED lamps are operating in normal (AC input) and emergency (DC input) modes.

BATTERY:

- Maintenance-free and 6V 4.5Ah rechargeable Lead-Calcium battery on emergency (EM) units.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours. Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 90 minute emergency illumination.
- LVD (Low Voltage Disconnection) prevents battery from deep discharge.

LISTING:

- 5 years limited warranty on materials and all electronics. Battery pro rated for two years.
- LED lamps are 25 years limited warranty.
- UL listed for damp locations & meets UL924, National Electrical Code, NFPA 70 and the Life Safety Code, NFPA 101.

ORDERING INFORMATION

EXAMPLE: ECL-R-1-WH

| MODEL | # OF FACE | LETTER COLOR | OPERATION | HOUSING COLOR |
|-------|-----------------------------------------|------------------|-------------------|--------------------------------------------------------------|
| ECL | (Blank) Universal Single/Double Face | R Red G Green | 1 Battery Back up | WH White Face/ White Housing BK Black Face/ Black Housing |

OPTIONS

| | |
|------|------------------------------------------------------|
| WG-3 | Steel Wire Guard (13.5" x 30" x 6") |
| BG-3 | Polycarbonate Vandal Shield Guard (15" x 30.5" x 7") |