

# ELT

Project Name:	
Type:	



### APPLICATION

These color capable luminaires bring flexibility and open doors to various types of applications. The RGB technology is a combination of three primary colors - red, green, and blue - to form a different array of colors. The RGBW technology is a combination of those three primary colors in addition to white. Additional white LEDs illuminates a much purer white tone and brings flexibility for color mixing through the RGB chips. Playing with different colors of the LEDs can form infinite color hue possibilities to not only just illuminate space, but manipulate for your desired hue and shades. Flexible control solutions from wireless remote, Bluetooth, to DMX512 with a wall mount touch panel can provide an ultimate solution to optimize the needs from residential to commercial, healthcare, education, retails, entertainment, office, and more.

### MOUNTING:

- Recessed ceiling mount.
- Compatible with most ceiling types.
- Field installed flange kit. (available as option)

### LISTING:

- UL/CUL listed and labeled.
- Listed to UL 1598 and UL 8750.
- Recessed Luminaires, Type IC
- Suitable for damp locations.
- Assembled in USA (optional).
- Warranty: **Power Supply:** 5 years limited warranty. **LED:** 15 years limited warranty.

### FEATURES:

- Die formed, cold-rolled, heavy gauge steel housing construction provides durability and strength.
- Standard steel door frame allows easy lens replacement without tool. Unique door frame design delivers a premium extruded appearance. Smooth edges for easy handling. Powder-painted, door steel latches provide easy, secure door closure.
- Painted parts finished with high-gloss baked white enamel over rust inhibiting phosphate coating.
- PAF (Painted After Fabrication) finish is standard for corrosion resistance and efficiency.

### CONFIGURATIONS

Series	Size	LED	RGB				RGBW					
			Total Watt	RED	GREEN	BLUE	Total Watt	RED	GREEN	BLUE	WHITE 30K	WHITE 42K
ELT-2G	1' x 4'	DLL	-	-	-	-	35.2W	88lm	368 lm	80 lm	1344 lm	1464 lm
		DLO	35.2W	160 lm	736 lm	152 lm	80W	346.64 lm	1600 lm	320 lm	3184 lm	3321 lm
		DHO	70.4W	320 lm	1472 lm	304 lm	160W	693.28 lm	3200 lm	640 lm	6368 lm	6624 lm
	2' x 2'	DLL	17.6W	80 lm	368 lm	76 lm	16W	44 lm	184 lm	40 lm	672 lm	732 lm
		DLO	35.2W	160 lm	736 lm	152 lm	40W	173.62 lm	800 lm	160 lm	1592 lm	1656 lm
		DHO	52.8W	240 lm	1104 lm	228 lm	80W	346.64 lm	1600 lm	320 lm	3184 lm	3312 lm
	2' x 4'	DLL	-	-	-	-	35.2W	88 lm	368 lm	80 lm	1344 lm	1464 lm
		DLO	35.2W	160 lm	736 lm	152 lm	80W	346.64 lm	1600 lm	320 lm	3184 lm	3312 lm
		DHO	70.4W	320 lm	1472 lm	304 lm	160W	693.28 lm	3200 lm	640 lm	6368 lm	6624 lm

### CEILING OPENING

Series	Size	Width	Length
FK	1' x 2'	12-3/16"	24-1/4"
	1' x 4'	12-3/16"	48-1/4"
	2' x 2'	24-3/16"	24-5/16"
	2' x 4'	24-3/16"	48-1/4"
FTSH	1' x 2'	11-15/16"	24-11/16"
	1' x 4'	11-15/16"	48-1/2"
	2' x 2'	24-1/8"	24-3/4"
	2' x 4'	24-1/8"	48-1/2"

# ELT

**ORDERING INFORMATION**

**EXAMPLE:** ELT22-2G-DLO-RGBW-42K-WA125-UNV-BLT




MODEL		LED		SYSTEM		DOOR FRAME	
ELT14-2G	1' x 4'	DLL	Low Low output	RGBW-30K	RGBW with wireless or Bluetooth solution, 3000K white <sup>4</sup>	(Blank)	Flush Steel, White
ELT22-2G	2' x 2'	DLO	Low output	RGBW-42K	RGBW with wireless or Bluetooth solution, 4200K white <sup>4</sup>	SB	Flush Steel, Black
ELT24-2G	2' x 4'	DHO	High output			FB	Flush Aluminum, Black
						FN	Flush Aluminum, Natural
						FW	Flush Aluminum, White
						RB	Regressed Aluminum, Black
						RN	Regressed Aluminum, Natural
						RW	Regressed Aluminum, White
						AMB	Anti-Microbial Coating (Matte Skye White)

TRIM TYPE		DIFFUSER		VOLTAGE		LED DRIVER		CONTROLS <sup>4</sup>	
(Blank)	Grid	WA125	Lumieo white acrylic lens 0.125" Thick	UNV	120-277V	CV24	24VDC Power Supply	WL-MZ-WH	4-Zone RF remote, white
FK	Flange <sup>1</sup>			120	120V	4DMX	4-Channel DMX512 decoder	WL-MZ-BK	4-Zone RF remote, black
FTSH	Flanged Trim <sup>2</sup>			277	277V			BLT	Bluetooth / Smartphone App
						(Blank)	No options or controls from below	DMXT14	4-zone DMX512 wall mount touch panel, 85-265VAC input only
								DMXT8	4-zone DMX512 wall mount touch panel, 5vdc adapter provided

OPTIONS	
ARRA	Assembled in USA for Buy American Act
MS11	Master Slave w/ 11' Whip
PW6	Pre-wired 6' Whip Flex
GS1	Single Gasketing
GS2	Double Gasketing
GS3	Triple Gasketing
WL-HLD-WH	Remote holder for WL-MZ, white
WL-HLD-BL	Remote holder for WL-MZ, black

**NOTES:**

1. Flange kits are supplied in separate boxes, field installed.
2. Flanged trims are supplied with swing gate hanger.
3. Custom wattage or lumen is not available. Refer to configurations chart for more information.
4. Refer to Table1 and Table 2 to find more information.



Specifications: 1'x4'

Length: 47-3/4 (1213)  
 Width: 11-15/16 (303)  
 Depth: 4-1/2 (115)  
 Weight: 16.16 lbs (7.33 kg)

Specifications: 2'x2'

Length: 23-3/4 (603)  
 Width: 23-15/16 (608)  
 Depth: 3-1/2 (88.9)  
 Weight: 13.07 lbs (5.93 kg)

Specifications: 2'x4'

Length: 47-3/4 (1213)  
 Width: 23-15/16 (608)  
 Depth: 3-1/2 (88.9)  
 Weight: 21.01 lbs (9.53 kg)

All dimensions are in inches (millimeters).

**RGBW CONFIGURATION**

Input Voltage	24V
Watt / foot	9.3 W/ft, 563 lm/W
Lumen / foot	R: 36.82 lm/ft
	G: 79.55 lm/ft
	B: 25.82 lm/ft
	W: 100.35 lm/ft (30K), 116.8 lm/ft (40K)
CRI for white LEDs	80
Color Consistency	3-step MacAdam binning
Lumen Maintenance	> 50,000 hours
Control Options	Wireless Easy control remote, Group / Multi Zone wireless remote, Bluetooth (Smartphone / APP)
Warranty	5 years limited warranty for power supply, 15 years limited warranty for LED source

**CONTROL (TABLE 1)**



\* Remote holder sold separately



**WL-MZ (RF remote control)**

Dimensions	W 2" x D 0.825" x H 4.725"
Weight	0.1lbs
Signal Type	RF (Radio Frequency) 2.4GHz
Range	98ft from fixture open air
Zone / Mode	4 zones / 9 modes
Working Temp.	-4°F to 131°F (-20°C to 55°C)
* Battery	2 x AAA battery

\* Not included



**WL-HLD-WH**



**WL-HLD-BK**



**Smart Life**




**Tuya Smart**

**BLT (Bluetooth / Smartphone App)**

	Bluetooth
Software	IOS 8.0 and up, Android 4.4 and up
App	Smart Life or Tuya Smart supported
Features	Group, Scenes
Bluetooth Distance	> 49ft in open area
Additional Feature	Home Management / Third party control -> Alexa, Google Assistant (by others)

**4DMX (TABLE2)**

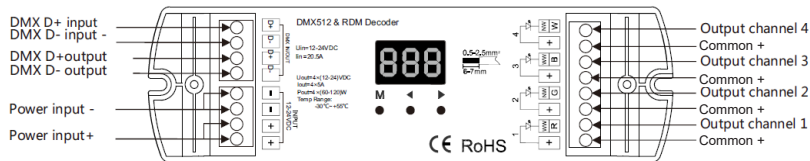

**4DMX (4-channel DMX decoder)**

Dimensions	L 6.7" x W 2" x D 0.9"
Output Current	5A / channels
Input Voltage	12-24V DC
Output Power	4 x (60-120)W
Frequency	PWM output



**DMXT14**

Zone	4 zone
Signal	DMX512 protocol
Input Voltage	85-265VAC
Dimensions	L 3.4" x H 3.4" x D 1.45"
Features	10 built-in mode, scene
Operating Temp.	-22°F ~ 131°F (-30°C ~ 55°C)



**DMXT8**

Zone	4 zone
Signal	DMX512 protocol
Dimensions	L 7" x H 1.3" x D 1.9"
Features	12 built-in mode, scene
Operating Temp.	-22°F ~ 131°F (-30°C ~ 55°C)