


# EP LED

Project Name:	
Type:	



EP Surface mount

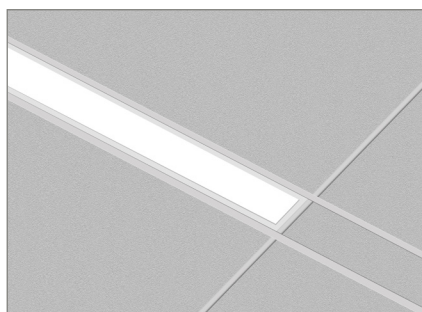

EP Recessed mount

**MOUNTING:**

- Surface mount (surface mount kit is provided).
- Recessed mount.

**LED:**

- High quality array LEDs.
- Color Rendering Index: >80
- Field adjustable color temperature: 3000/3500/4000(K)
- Field adjustable wattage on selected models.

**FINISH:**

- White finish.

**ELECTRICAL:**

- 0-10V dimming.
- 120-347V, 50/60Hz
- Power Factor: >0.90

**LISTING:**

- UL listed.
- 5 years warranty.



**APPLICATION**

The edge lit EP LED flat panel series is embedded with field adjustable color temperatures to suit various application needs. This low-profile flat panel brings a seamless look for any commercial, offices, schools, healthcare, and retail environments.

**CONFIGURATIONS**

Series	Size	Model #	AC Input	Lumen Output	Lumen Efficiency
EP LED (Surface)	44	20/30/40LED	20/30/40W	1700 lm, 2550 lm, 3400 lm	85 lm/W
	46	20/30/40LED	20/30/40W	1800 lm, 2700 lm, 3600 lm	90 lm/W
EP LED (Recessed)	26	10/15/20LED	10/15/20W	950 lm, 1425 lm, 1900 lm	95 lm/W
	44	20/30/40LED	20/30/40W	1700 lm, 2550 lm, 3400 lm	85 lm/W
				1900 lm, 2850 lm, 3800 lm	95 lm/W
	84	40/60/80LED	40/60/80W	3400 lm, 5100 lm, 6800 lm	85 lm/W
	86			3800 lm, 5700 lm, 7600 lm	95 lm/W

: Based on 4000K.

CCT	Multiplier	
	3000K	3500K
Down only	0.9642	0.9822

# EP LED

**ORDERING INFORMATION**

*EXAMPLE: EP-44-20/30/40LED-30/35/40K-UNV*

MODEL	LENGTH	LED		COLOR TEMP.		VOLTAGE		MOUNTING	
EP (Surface)	44 46 4"x4" 4"x6"	20/30/40LED	20/30/40W	-30/35/40K	Selectable 30/35/40K	UNV	120-347V	(Blank)	Surface Mount (recessed driver box included)

PRESET		OPTION		LIGHTING CONTROL SYSTEM	
(Blank) PS	Non-Preset Preset Request * Factory default setting: 35K	REM8W	1296 LUMEN Remote EM for Field installation (Remote box not included)	PPA102S	<Bluetooth> Bluetooth Powerpack (Consult factory for installation location)

**ORDERING INFORMATION**

*EXAMPLE: EP-46-20/30/40LED-30/35/40K-UNV-G1*



MODEL	LENGTH	LED		COLOR TEMP.		VOLTAGE		MOUNTING	
EP (Recessed)	26 2"x6"	10/15/20LED	10/15/20W	-30/35/40K	Selectable 30/35/40K	UNV	120-347V	G1	9/16", 15/16", 1" T-bar Ceiling Grid
	44 4"x4"	20/30/40LED	20/30/40W						
	46 4"x6"								
	84 8"x4"	40/60/80LED	40/60/80W						
86 8"x6"									

PRESET		OPTION		LIGHTING CONTROL SYSTEM	
(Blank) PS	Non-Preset Preset Request * Factory default setting: 35K	REM8W	1296 LUMEN Remote EM for Field installation (Remote box not included)	PPA102S	<Bluetooth> Bluetooth Powerpack (Consult factory for installation location)

**COMPATIBLE DIMMER SWITCH**



Model #	Brand	Compatible Dimmer Switch	
(Blank)	-	<Lutron>	Diva DDTV

**EP-2-20LED**

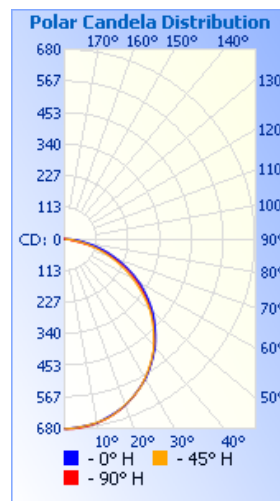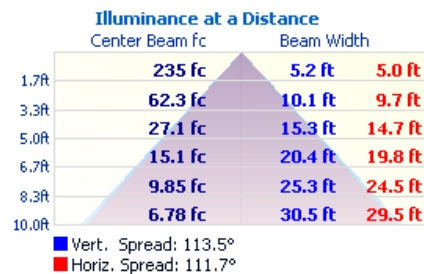

# EP LED

### EP Surface mount

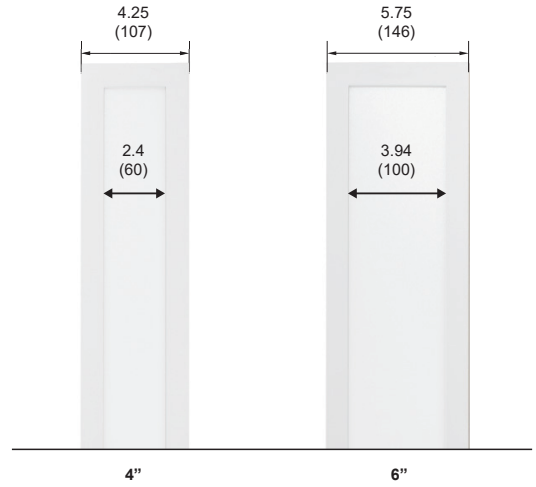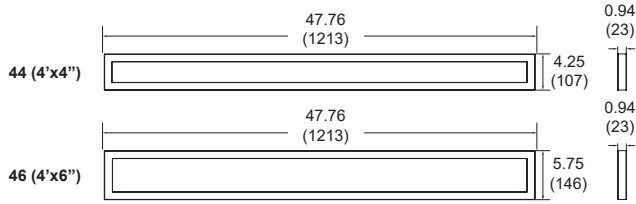



### Surface mount kit



This metal plate is equipped with screw holes for bolting to the ceiling, and 4 small static corner hooks on the mounting plate.

# EP LED

**EP Recessed mount**

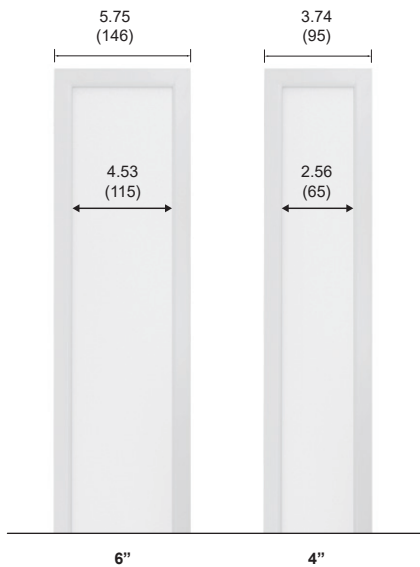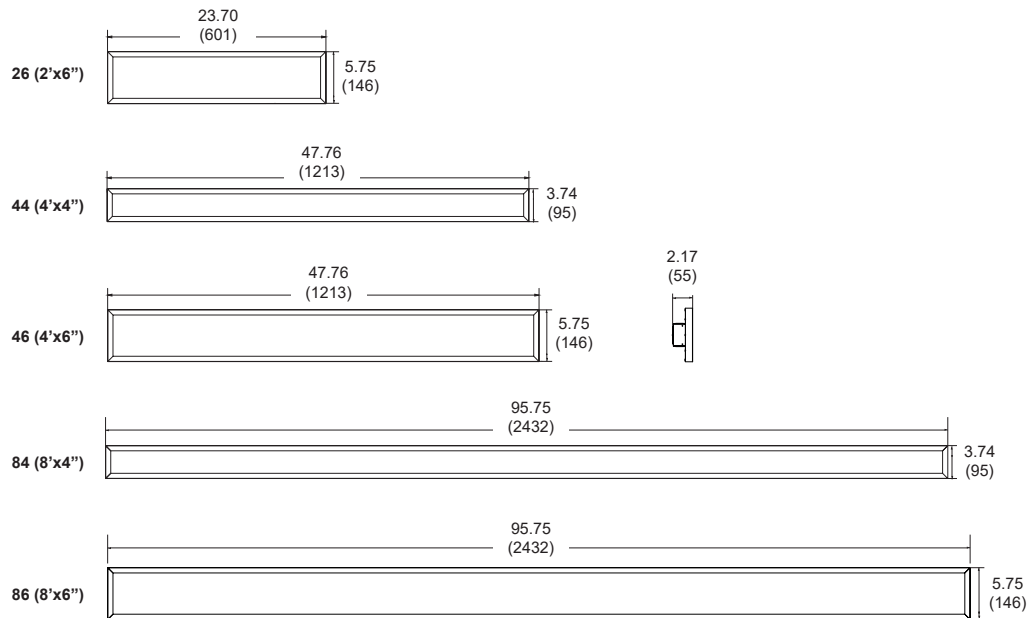

**Recessed Driver Box**



This metal box is equipped with screw holes for bolting to the fixture to protect wires.