


EW

DISCONTINUED

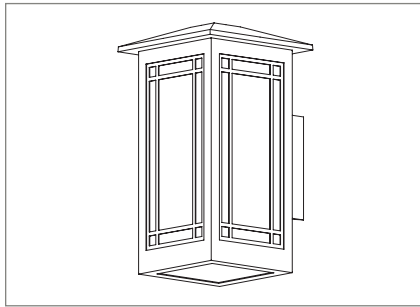

APPLICATION

The Eastern-style wall sconce. Ideal for walkways, building exterior walls, underpasses and accent wall sconces.

FEATURES:

- Fabricated metal housing with internal reinforcing corner extrusions.
- Diffuser accent panel creates a three dimensional effect.
- Cast aluminum top roof.
- Oven cured no VOC acrylic powder coat.
- Fabricated 1/8" thick white acrylic diffuser, F1 rated, UV stable, UL-94 HB flame class rated.
- Easy tool-less relamping.

MOUNTING:

- Mounts to standard electrical junction box (by others) with provided hardware.

LAMP:


- Compact fluorescent.
- Lamps furnished by others.

ELECTRICAL:

- High power factor electronic ballast, 0°F/-18°C starting temperature. (fluorescent)

LISTING:

- UL listed for wet location mounting 4' above grade.
- 5 year product warranty.
- ARRA compliant.

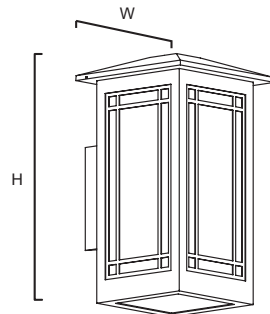

Specifications: EW

Width: 7 (178)
 Height: 12-1/4 (311)
 Depth: 7-3/4 (197)

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: EW-126-UNV-VG-REM

MODEL	LAMP TYPE		VOLTAGE		FINISH		OPTIONS	
EW	113	13W Quad, 4-pin G24q-1 Base	UNV	120-277V	(Painted) OBRZ	Color Code Required Old Bronze	REM	Remote EM (32°F ~ 122°F / 0°C ~ 50°C)
	118	18W Quad, 4-pin G24q-2 Base	120	120V			REMCW	Remote EM for Cold Weather (-4°F ~ 122°F / -20°C ~ 50°C)
	126	26W Quad, 4-pin G24q-3 Base	277	277V			EMC	CEC compliant EM ¹
							VG	Verdigris Patina over Copper
							LP	Lamps Provided (Specify Color Temperature)
							BG	Bird Guard, Stainless Steel Spikes

NOTES:

1. Check with factory for more details.