



FLC2

DISCONTINUED

APPLICATION

Building facades, back yard lighting, sign lighting, display and other general applications where floodlighting may come into use. As well as general safety and security lighting.

FEATURES:

- Heavy duty die-cast aluminum housing and door frame. Housing is dark bronze polyester powder paint finish standard. Also available in white, black and custom color finish.
- Silicone rubber gasket between backplate and front cover for wet locations.
- Anodized aluminum reflector with high efficiency, heat and impact resistant tempered clear glass lens.

MOUNTING:

- Provided with a standard heavy-duty 1/2" adjustable slip fitter mount for both ground and wall mount.

LAMP:


- HPS lamp, MH lamps use a medium base (E26/ED17) porcelain socket with screw shell and center contact.
- Lamp included.

ELECTRICAL:

- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system.


LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant (optional).

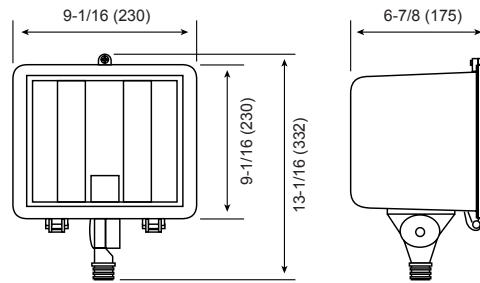

Specifications: FLC2
 Height: 13-1/16 (332)
 Width: 9-1/16 (230)
 Depth: 6-7/8 (175)

All dimensions are in inches (millimeters).



ASSEMBLY PARTS :
 Mount Base - Round Bell Cover

ORDERING INFORMATION

EXAMPLE: FLC2-M100-120-BZ

MODEL	LAMP TYPE				BALLAST	
FLC2	M70	70W Metal Halide	H70	70W High Pressure Sodium	(Blank) PS SCWA	Standard Pulse Start MH ¹ Super CWA Pulse Start Ballast ²
	M100	100W Metal Halide	H100	100W High Pressure Sodium		
	M150	150W Metal Halide	H150	150W High Pressure Sodium		
	M175	175W Metal Halide				
VOLTAGE		FINISH		OPTIONS		
120	120V	BZ	Dark Bronze (Std.)	F1	Single Fuse (120, 277 or 347V only) ³	
208	208V	WH	White	F2	Double Fuse (208, 240 or 480V only) ³	
240	240V	BK	Black	PC1	With Photocell - Button Type 120V	
277	277V			PC2	With Photocell - Button Type 277V	
QT	120/208/240/277V		Available custom color (RAL) Please provide us with the RAL number.	WG	Steel Wire Guard for FLC2	
				VS	Visor Cutoff Shield for FLC2	
				RB-03	Mount Base - Round Bell Cover	
				ARRA	Assembled in USA for Buy American Act	

NOTES:
 1. Pulse start metal halide available on 70, 100, 150 and 175W only.
 2. Super CWA available on 100, 150 and 175W only.
 3. Must specify voltage.