


FLEDR-2

DISCONTINUED

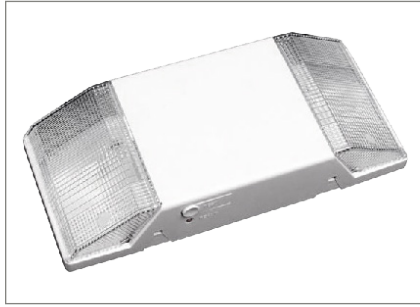

FEATURES:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black housing.

MOUNTING:

- Universal knockout pattern on back plate for surface mount. Snaps into place making internal electrical connections.
- Suitable for wall or ceiling mount.

ELECTRICAL:

- 120V/277V 60Hz dual voltage operation standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.

LED:


- Two fixed, 12 LEDs per head.
- High performance, chrome-plated metallized reflector and plastic lens for optimal light distribution.

BATTERY:

- Maintenance-free, rechargeable NiCd battery, 3.6V long life on emergency (EM) units.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 90 minute emergency illumination.

LISTING:

- 5 years limited warranty on all electronics and housing. Battery prorated for 5 years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations (0°C to 40°C).
- NFPA 70 compliant.

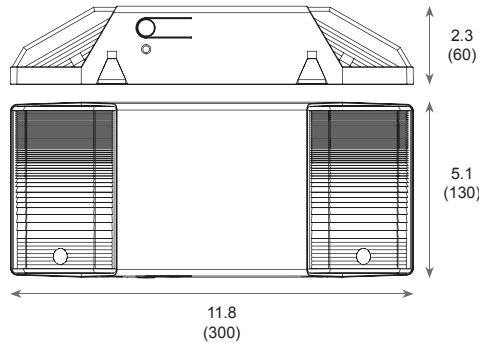

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: FLEDR-2

MODEL	HOUSING COLOR		OPTIONS	
FLEDR-2	(Blank) BK	White Housing Black Housing	WG-1 BGR-1	Steel Wire Guard (13.5" x 15" x 6") Polycarbonate Vandal Shield Guard (7.5" x 18" x 5")