

FLPL100-LED

Project Name:	
Type:	

DISCONTINUED



FEATURES:


- Photoluminescent unframed thin and low profile plastic exit sign with consistent and uniform illumination.
- Nontoxic, non-radioactive, no disposal cost. Recyclable.
- 100 feet viewing distance.
- Red or Green panel available.
- No energy consumption, no electricity cost, green design and LEED points qualified.
- Single or double sided.
- Two self-adhesive chevron stickers are included in case the directional chevron(s) is required.
- Need at least 5 foot candle of LED or fluorescent illumination on the face(s) of the sign at all times of building occupancy.
- Explosion-proof for areas requiring explosion-proof exit signage.

MOUNTING:

- Mounting hardware for surface, flag or ceiling mount included as standard.

LISTING:


- UL 924 listed for Indoor use.
- In compliance with IBC and IFC codes.
- OSHA and NFPA 101-Life Safety Code compliant.
- Listed for high-location and floor-proximity installation.

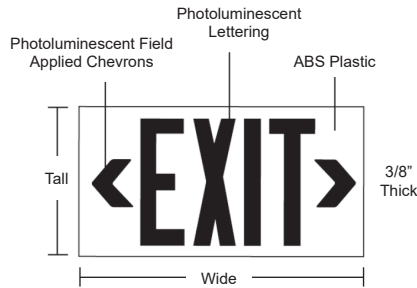

Specifications: FLPL100-LED

Tall: 8-3/4 (222)
Wide: 15-3/8 (390.5)

All dimensions are in inches (millimeters).

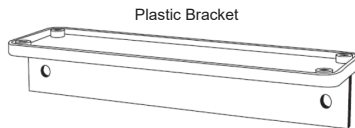

(Mounting Hardware Included)

ORDERING INFORMATION

EXAMPLE: FLPL100-LED-S-R

MODEL	# OF FACE	PANEL COLOR								
FLPL100-LED	<table border="0"> <tr> <td>S</td> <td>Single</td> </tr> <tr> <td>D</td> <td>Double</td> </tr> </table>	S	Single	D	Double	<table border="0"> <tr> <td>R</td> <td>Red plastic body with yellow letter</td> </tr> <tr> <td>G</td> <td>Green plastic body with yellow letter</td> </tr> </table>	R	Red plastic body with yellow letter	G	Green plastic body with yellow letter
S	Single									
D	Double									
R	Red plastic body with yellow letter									
G	Green plastic body with yellow letter									