

FLPL50

DISCONTINUED
Limited Stock Available



FEATURES:


- High Illumination Non-Electric Photo Luminescent.
- Aluminum construction with photo luminescent lettering.
- 50 feet viewing distance.
- Need at least 5 foot candle of fluorescent light on the face of the sign at all times.
- Non-Toxic and Non-Radioactive.
- Background color available in red, green, black, brushed aluminum background with red letter outline, or brushed aluminum background with green letter outline.
- Frame color available in red, green, white, black, or sliver.
- Mounting bracket color available in red, green, white, black, or sliver.
- Material is recyclable.

MOUNTING:

- Screw hole on the edges for surface wall mount.
- Frame and mounting bracket is optional.

LISTING:

- 5 years limited warranty.
- UL/CUL listed and labeled.
- Suitable for damp location.
- Meets UL924, International Building Fire Codes, the Life Safety Code ANSI/NFPA 101, OSHA and State of California State Fire Marshal.

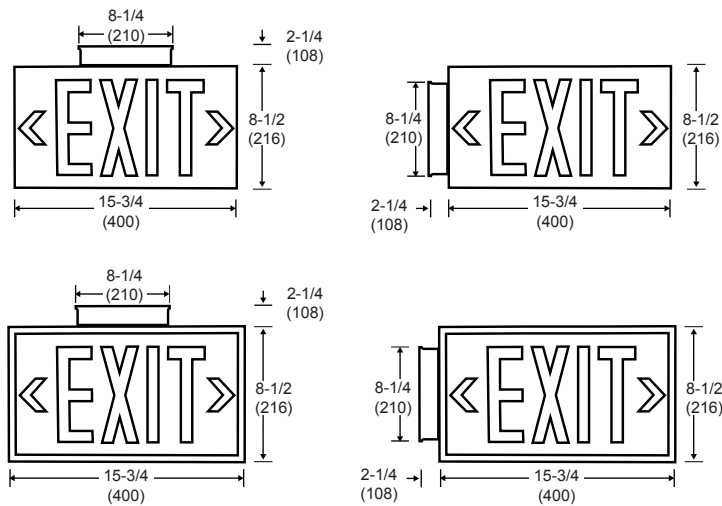

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: FLPL50-S-SR-SL

MODEL	# OF FACE	BACKGROUND COLOR		FRAME COLOR		MOUNTING BRACKET	
FLPL50	S Single	R Red Background G Green Background B Black Background SR Brushed Aluminum Background with Red Letter Outline SG Brushed Aluminum Background with Green Letter Outline	(Blank)	Without Frame	(Blank)	Without Mounting Bracket	
	D Double						R Red Frame G Green Frame W White Frame B Black Frame SL Sliver Frame