

FLPL75

DISCONTINUED
Limited Stock Available



FEATURES:


- High Illumination Non-Electric Photo luminescent.
- Aluminum construction with photo luminescent background.
- 75 feet viewing distance.
- Need at least 5 foot candle of fluorescent light on the face of the sign at all times.
- Non-Toxic and Non-Radioactive.
- Letter color available in red or green.
- Frame color available in red, green, white, black, or silver.
- Mounting bracket color available in red, green, white, black, or silver.
- Material is recyclable.

MOUNTING:

- Screw hole on the edges for surface wall mount.
- Frame and mounting bracket is optional.

LISTING:

- 5 years limited warranty.
- UL/CUL listed and labeled.
- Suitable for damp location.
- Meets UL924, International Building Fire Codes, the Life Safety Code ANSI/NFPA 101, OSHA and State of California State Fire Marshal.

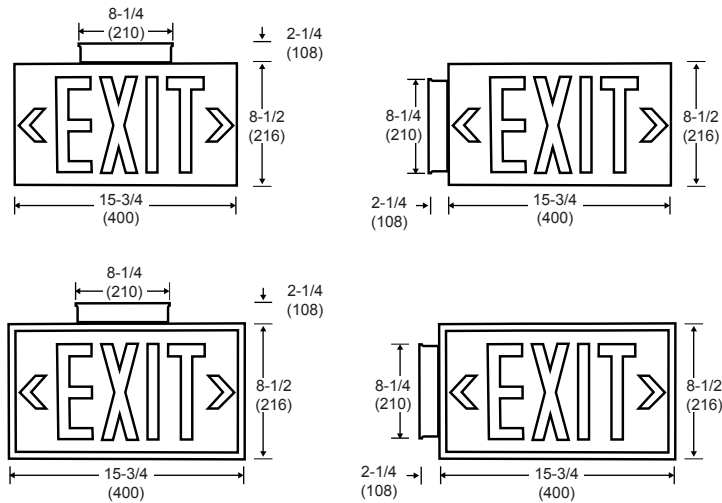

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: FLPL75-S-R-SL

MODEL	# OF FACE	BACKGROUND COLOR	FRAME COLOR	MOUNTING BRACKET
FLPL75	S Single ¹	R Red Letter Color G Green Letter Color	(Blank) Without Frame R Red Frame G Green Frame W White Frame B Black Frame SL Silver Frame	(Blank) Without Mounting Bracket G Green Mounting Bracket W White Mounting Bracket B Black Mounting Bracket SL Silver Mounting Bracket

NOTES:

1. A combination of Red letter and Red frame is not available.