

HLWLEZU

Project Name:	
Type:	



APPLICATION

Ideal for commercial where economy, appearance and the ultimate ease of installation and maintenance are desired. Solid-state electronics offer both reliability and low-cost performance.

FEATURES:

- Housing is fiberglass reinforced polycarbonate construction in gray finish.
- Corrosion-resistant enclosure with one piece, highimpact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- EZ snap-out chevron directional indicators.

MOUNTING:

- Die-cast mounting brackets provided for surface wall- mount installation.
- Pre-installed conduit hub for conduit and pendant-mount installations.

ELECTRICAL:

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).
- Charge rate/power “ON” LED indicator light and magnetic test switch for mandated code compliance testing.

LAMPS:

- Ultra bright, energy efficient, long life Red or Green LEDs.

BATTERY:


- 4.8V long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

OPTIONS:

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.

LISTING:

- 5 years limited warranty on materials and all electronics. Battery prorated for five years.
- Meets UL924, UL844, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- IP66 rated for Ingress Protection.
- Rated for Class 1, Division 2, Groups A, B, C & D.
- UL Listed for damp locations (-20°C – 50°C).
- Certified to CEC under Title 20 Regulations.

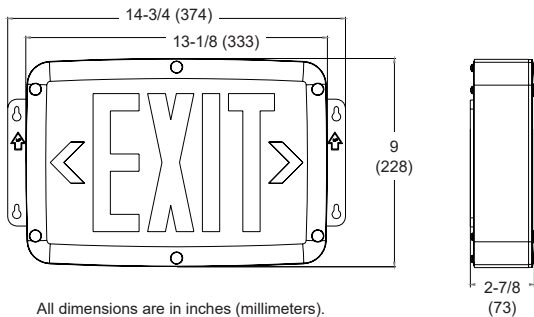

ELECTRICAL INFORMATION

	Input Watts (W)	Input Amps (A)
HLWLEZU-RED/GREEN/ EM/SDT	120V : 3.0W	120V : 0.03A
	277V : 3.0W	277V : 0.02A

ORDERING INFORMATION

EXAMPLE: HLWLEZU-R-G

MODEL	# OF FACE		LETTER		OPERATION		HOUSING COLOR		OPTIONS	
HLWLEZU	(Blank)	Universal Single/Double Face	R G	Red Green	(Blank) EM 2A 2B	AC-only Battery Back up Dual circuit (120V) Dual circuit (277V)	G	Gray	SDT TP ARRA	Self Diagnostics ² Tamper-proof Assembled in USA for ARRA and BAA compliant

NOTES:

1. Field selectable
2. Available only with EM units.