


LINEA

Project Name:	
Type:	

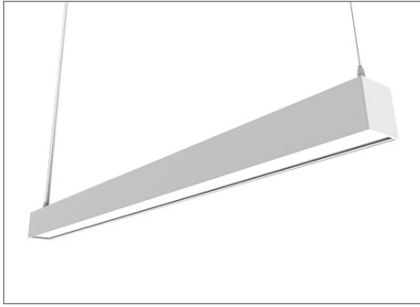

APPLICATION

The LINEA is a featured Architectural Linear fixture. Housing is formed by extruded aluminum with field adjustable color temperatures, and up and down distribution. Ideal for commercial, general office, bank, retails and educational environments.

FEATURES:

- Aluminum extruded housing.
- Field AB switching is standard (CCT, up/down control).
- Available in White only.
- Operating temperature: -4°F ~ 122°F (-20°C ~ 50°C)

MOUNTING:

- AC cable pedant mount (AC120 standard).

LENS:

- 0.05" thickness PC frosted lens for both up and down.
- Beam angle 120°.

LED:

- High quality array LEDs.
- CRI >80
- Field adjustable CCT: 3000/3500/4000K
- Max. 50W total (selectable 35W down, 50W up and down, 15W up).
- L70: >50,000 hours

ELECTRICAL:

- 0-10V dimming standard.
- 120-347Vac, 50/60Hz
- THD: <20%
- PF : >0.9
- Class 2

LISTING:

- ETL listed.
- Suitable for damp & dry location.
- 5 years limited warranty.

CONFIGURATIONS

Series	Length	Model	AC Input	Lumen Output	Lumen Efficiency
LINEA	4FT	D35L-U15L	50W	5500 lm	110 lm/W
	8FT	D70L-U30L	100W	11000 lm	110 lm/W

ORDERING INFORMATION

EXAMPLE: LINEA-4-D35L-U15L-3T-UNV-WH-AC120

MODEL	ROW		SECTION		LED ¹		COLOR TEMP. ¹	
LINEA	(Blank) CON	Individual Mount	4	4' Length	D35L-U15L	D35W (1116 lm/ft), U15W (478 lm/ft)	3T	Selectable 30/35/40K
		Continuous Row Mount ³	8	8' Length	D70L-U30L	D70W (1116 lm/ft), U30W (478 lm/ft)		

MOUNTING		VOLTAGE		FINISH ²		CEILING TYPE		SUSPENSION LENGTH	
(Blank) W	Pendant Wall Mount	UNV	120-347V	WH	Glossy White RAL#9010 (Std.)	X1	T-bar ceiling	AC48	Adjustable Aircraft Cable Canopy 48"L
				BK	Matte Black RAL#9005	X2	Hard ceiling	AC96	Adjustable Aircraft Cable Canopy 96"L
				SL	Matte Grey RAL#7035	X3	Sloped ceiling ⁴	AC120	Adjustable Aircraft Cable Canopy 120"L (Std.)

^{*} Contact factory for custom length.

LED DRIVER		OPTIONS		LIGHTING CONTROL SYSTEM	
(Blank)	0-10V dim to 5% (Std.)	EM8	EM 1296 LUMEN ¹	PPA102S	<Bluetooth> Bluetooth Powerpack (Consult factory for installation location)
		EM15	EM 2430 LUMEN ¹		
		EM20	EM 3240 LUMEN ¹		
		5C	5" Dia Canopy kit for J-box mount		

NOTES:

1. Contact factory for other emergency ballast options.
2. Matching product finish, cord and canopy finish is standard (Silver finish with white cord & canopy).
3. Max number of fixtures to link for continuous run:
LINEA-4FT: 7pcs @ 120V, 14pcs @ 277V, 20pcs @ 347V
LINEA-8FT: 4pcs @ 120V, 9pcs @ 277V, 11pcs @ 347V
4. The X3 option comes standard with a 5-inch canopy.

LINEA

UP & DOWN DISTRIBUTION

4FT

Down 35W
Down 35W + Up 15W
Up 15W

8FT


Down 70W
Down 70W + Up 30W
Up 30W

DOWN CCT


3000K
3500K
4000K

UP CCT

3000K
3500K
4000K

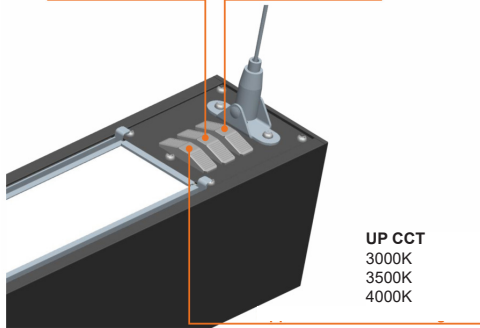


WALL MOUNT OPTION

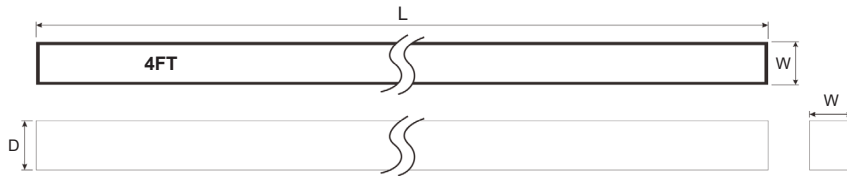

Specifications: LINEA

Length: 4ft: 47.48 (1206)
8ft: 94.72 (2406)
Width: 2.75 (70)
Depth: 3.15 (80)

All dimensions are in inches (millimeters).

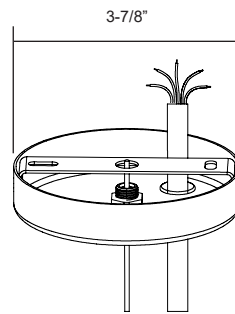

CANOPY (Standard)

LINEA-4-D35U15

Illuminance at a Distance

	Center Beam fc	Beam Width
1.7R	376 fc	4.4 ft
3.3R	99.9 fc	8.5 ft
5.0R	43.5 fc	13.0 ft
6.7R	24.2 fc	17.4 ft
8.3R	15.8 fc	21.5 ft
10.0R	10.9 fc	25.9 ft

■ Horiz. Spread: 104.7°

LINEA-4-D70U30

Illuminance at a Distance

	Center Beam fc	Beam Width
1.7R	724 fc	4.4 ft
3.3R	192 fc	8.5 ft
5.0R	83.7 fc	13.0 ft
6.7R	46.6 fc	17.4 ft
8.3R	30.4 fc	21.5 ft
10.0R	20.9 fc	25.9 ft

■ Horiz. Spread: 104.7°