

LWP1

DISCONTINUED



APPLICATION

The borosilicate glass lensed wall pack is ideal for commercial and residential applications with wall mounting. Use on factories, warehouses, self storage, commercial buildings, entrances, walkways and loading docks.

FEATURES:

- Die-cast aluminum housing and hinged door frame with prismatic borosilicate glass lens refractor.
- Door frame holds lens and seals to housing gasket with two stainless steel screws.
- Housing with 1/2" feed-through hubs provided.
- Housing has silicone gasket to seal to lens for wet location.
- Dark bronze powder finish is standard; white or black finish is also available.

MOUNTING:

- Wall mounting only.
- Easily installed on recessed junction boxes or on direct mounts to the wall with feed thru 1/2" conduit access.

REFLECTOR & COVER:

- Anodized specular aluminum reflector with high efficiency and wide beam spread.
- Heat and impact resistant tempered clear prismatic glass lens.

LAMP:


- Vertical lamp position, HID lamps have medium base (E26) or mogul base (E39) porcelain socket with screw shell and center contact.
- Lamp included.

ELECTRICAL:

- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant (optional).

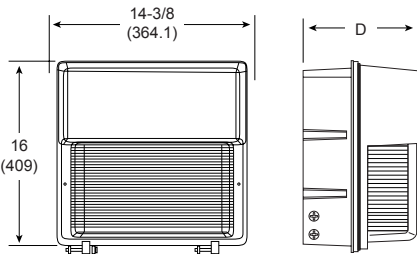

Specifications: LWP1

Height: 14-3/8 (364.1)
 Width: 16 (409)
 Depth: 9-3/4 (249)
 Weight: 19.18 lbs (8.7 kg)

All dimensions are in inches (millimeters).

LAMP CONFIGURATIONS

	HID	DEPTH
LWP1	M250, M320, M350, M400	9-3/4"
	H250, H400	

ORDERING INFORMATION

EXAMPLE: LWP1-M250-QT-BZ

MODEL	LAMP TYPE	BALLAST	VOLTAGE	FINISH
LWP1	M250 250W Metal Halide	(Blank) Standard PS Pulse Start ¹ SCWA Super CWA Pulse Start Ballast ²	UNV 120-277V ⁴	BZ Dark Bronze (Std.) WH White BK Black <small>* Available custom color (RAL) Please provide us with the RAL number.</small>
	M320 320W Metal Halide		120 120V	
	M350 350W Metal Halide		208 208V	
	M400 400W Metal Halide	240 240V		
	H250 250W High Pressure Sodium	277 277V		
	H400 400W High Pressure Sodium	347 347V 480 480V QT 120/208/240/277V		

OPTIONS

F1	Single Fuse (120, 277 or 347V only) ³
F2	Double Fuse (208, 240 or 480V only) ³
PC1	With Photocell - Button Type 120V
PC2	With Photocell - Button Type 277V
ARRA	Assembled in USA for Buy American Act
BG	Bird Guard, Stainless Steel Spikes

NOTES:

1. For pulse start metal halide.
2. Super CWA available on metal halide 150, 175, 250 and 400W only.
3. Must specify voltage.