

LWP3

DISCONTINUED

Project Name:	
Type:	



APPLICATION

The full cut-off large wall pack is ideal for both commercial and residential applications with wall mounting. Use on factories, warehouses, self storage, commercial buildings, entrances, walkways and loading docks.

FEATURES:

- Full cut-off dark sky compliant fixtures.
- Die-cast aluminum housing and hinged door frame.
- Door frame holds lens and seals to housing gasket.
- Anodized aluminum reflector with wide beam spread.
- Housing has silicone gasket to seal to lens for wet location.
- Dark bronze finish is standard; white or black finish is also available.

MOUNTING:

- Wall mounting only.
- Easily installed on recessed junction boxes or direct mounts to the wall with feed thru 1/2" conduit access.

REFLECTOR & COVER:

- Anodized aluminum reflector with high efficiency and wide beam spread.
- Heat and impact resistant tempered frost textured glass lens.

LAMP:


- HID lamps will have mogul base (E39) porcelain socket with screw shell and center contact.
- Lamp included.

ELECTRICAL:

- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C), 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C), 180°C insulation system.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant (optional).

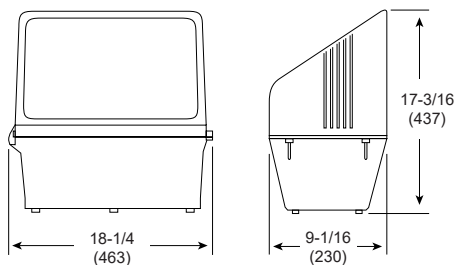

Specifications: LWP3

Height: 9-1/16 (230)
 Width: 18-1/4 (463)
 Depth: 17-3/16 (437)
 Weight: 18.67 lbs (8.47 kg)

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: LWP3-M400-QT-BZ

MODEL	LAMP TYPE		BALLAST		VOLTAGE		FINISH		
LWP3	M250	250W Metal Halide	(Blank)	Standard	120	120V	BZ	Dark Bronze (Std.)	
	M400	400W Metal Halide		PS	Pulse Start ¹	208		208V	White
	H250	250W High Pressure Sodium	SCWA	Super CWA Pulse Start Ballast ²	240	240V		BK	Black
	H400	400W High Pressure Sodium		277	277V	347		347V	
				480	480V				
					QT	120/208/240/277V			

* Available custom color (RAL)
Please provide us with the RAL number.

OPTIONS	
F1	Single Fuse (120, 277 or 347V only) ³
F2	Double Fuse (208, 240 or 480V only) ³
PC1	With Photocell - Button Type 120V
PC2	With Photocell - Button Type 277V
ARRA	Assembled in USA for Buy American Act
BG	Bird Guard, Stainless Steel Spikes

NOTES:

1. For pulse start metal halide.
2. Super CWA available on metal halide only.
3. Must specify voltage.