



MWP1

APPLICATION

This compact wall pack is ideal for both commercial and residential applications with wall mounting height requirements of 14 feet and below. Ideal for building entrances or walkways with wall mounting.

FEATURES:

- Injection-molded polycarbonate front cover and lens with a cast aluminum backplate for maximum heat dissipation.
- Silicone rubber gasket between backplate and front cover for wet locations.
- Anodized aluminum reflector with wide beam spread.
- Dark bronze finish is standard; white or black finish is also available.

MOUNTING:

- Wall mounting.
- Easily installed on recessed junction boxes or on direct mounts to the wall.

REFLECTOR & COVER:

- Anodized aluminum reflector with high efficiency and wide beam spread.
- High impact polycarbonate (with UV) prismatic clear diffuser.

LAMP:

- Compact fluorescent 13W, 18W, 26W, 32W or 42W 4-pin and 28W 2 pin lamps option.
- HID lamps will have medium base (E26) porcelain socket with screw shell and center contact.
- Lamp included.

ELECTRICAL:


- Electronic fluorescent lamp units have four-pin socket, UL approved. Uses a 120-277V 60Hz, type-1 outdoor, sound rate A and high power factor ballast with operating temperature of -20°F (-30°C).
- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system.
- 35W HPS 120V normal ballast factor only.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant (optional).



DISCONTINUED

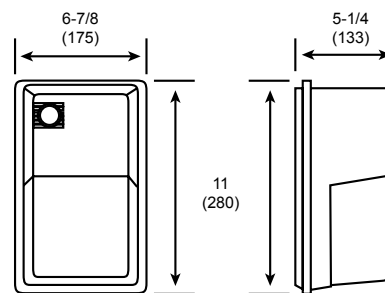

Specifications: MWP1

Height: 11 (280)
Width: 6-7/8 (175)
Depth: 5-1/4 (133)

All dimensions are in inches (millimeters).

LAMP CONFIGURATIONS

CFL	HID
113, 213	M35, M50
118, 218	H35, H50, H70
126, 226	
132, 142	
128	

ORDERING INFORMATION

EXAMPLE: MWP1-126-120-BZ-PC1

MODEL	LAMP TYPE		VOLTAGE	
MWP1	113	(1) CF13 DTT, 4-Pin	132	(1) CF32 TRT, 4-Pin
	213	(2) CF13 DTT, 4-Pin	142	(1) CF42 TRT, 4-Pin
	118	(1) CF18 DTT, 4-Pin	128	(1) CF28 DTT, 2-Pin
	218	(2) CF18 DTT, 4-Pin	M50	50W Metal Halide ¹
	126	(1) CF26 TRT, 4-Pin	H35	35W High Pressure Sodium ¹
	226	(2) CF26 TRT, 4-Pin	H50	50W High Pressure Sodium ¹
		H70	70W High Pressure Sodium ¹	
			120	120V
			277	277V
			UNV	120-277V ²
FINISH		OPTIONS		
BZ	Dark Bronze (Std.)	F1	Single Fuse (120, 277 or 347V only) ³	
WH	White	F2	Double Fuse (208, 240 or 480V only) ³	
BK	Black	PC1	With Photocell - Button Type 120V (Std.)	
	Available custom color (RAL)	PC2	With Photocell - Button Type 277V	
	Please provide us with the RAL number.	NPC	Without Photocell - button type	
		ARRA	Assembled in USA for Buy American Act	

NOTES:

1. 120V only.
2. Multi-voltage for compact fluorescent (120-277V).
3. Must specify voltage.