



MWP3

DISCONTINUED

APPLICATION

Its curved lens creates a wider vertical sweep. Entry or perimeter security lighting applications for commercial buildings. Ideal for building entrances or walkways with wall mounting.

FEATURES:

- Die-cast aluminum rear housing for maximum heat dissipation.
- Injection-molded, high impact polycarbonate front cover and clear prismatic diffuser.
- Anodized specular aluminum reflector with wide beam spread.
- Silicone rubber gasket between backplate and front cover for wet locations.
- Dark bronze finish is standard; white or black finish is available.
- Side hub supplied for field installation of button photocell. (Ordered separately)
- Optional emergency battery back-up for compact fluorescent type only.

MOUNTING:

- Wall mounting.
- Easily installed on recessed junction boxes or on direct mounts to the wall with feed through 1/2" conduit access.

LAMP:


- Compact fluorescent 4-pin (triple tube) lamps. One or two lamp option.
- HPS 35-70W lamp option available. Lamps will have medium base porcelain socket with screw shell and center contact.
- Lamp included.

ELECTRICAL:

- Electronic fluorescent lamp units have four-pin socket, UL approved. Uses a 120-277V 60Hz, type-1 outdoor, class P and high power factor ballast.
- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system.
- 35W HPS 120V normal ballast factor only.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant (optional).

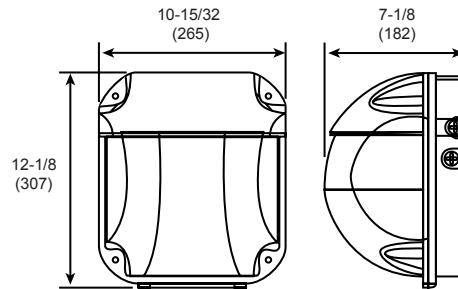

LAMP CONFIGURATIONS	
CFL	HID
126, 226 132, 232 142, 242	H35, H50, H70

Specifications: MWP3

Height: 12-1/8 (307)
Width: 10-15/32 (265)
Depth: 7-1/8 (182)

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: MWP3-242-UNV-BZ

MODEL	LAMP TYPE			VOLTAGE		
MWP3	126	(1) CF26, 4-Pin	H35	35W High Pressure Sodium ¹	120	120V
	226	(2) CF26, 4-Pin	H50	50W High Pressure Sodium ¹	277	277V
	132	(1) CF32, 4-Pin	H70	70W High Pressure Sodium ¹	UNV	120-277V ²
	232	(2) CF32, 4-Pin				
	142	(1) CF42, 4-Pin				
	242	(2) CF42, 4-Pin				
FINISH			OPTIONS			
BZ	Dark Bronze (Std.)		F1	Single Fuse (120, 277 or 347V only) ³		
WH	White		F2	Double Fuse (208, 240 or 480V only) ³		
BK	Black		PC1	With Photocell - Button Type 120V (Std.)		
	Available custom color (RAL) Please provide us with the RAL number.		PC2	With Photocell - Button Type 277V		
			NPC	Without Photocell - button type		
			EM	Emergency Ballast ⁴		
			ARRA	Assembled in USA for Buy American Act		

NOTES:

1. 120V only.
2. Multi-voltage ballast for compact fluorescent (120-277V).
3. Must specify voltage.
4. Only for compact fluorescent unit. (Emergency Ballast options, see page 79).