



MWP5

DISCONTINUED

APPLICATION

Die-cast mini wall pack is ideal for both commercial and residential applications with wall mounting height requirements of 14 feet and below. Use on commercial buildings, entrances, stairwells, walkways and corridors lighting.

FEATURES:

- Die-cast aluminum housing with high impact heat resistant borosilicate glass lens.
- Housing with 1/2" tapped holes available for installing a photocell. (not included, optional)
- Housing has silicone gasket to seal to lens for wet location.
- Dark bronze finish is standard; white or black finish is also available.

MOUNTING:

- Wall mounting.
- Easily installed on recessed junction boxes or on direct mounts to the wall.

REFLECTOR & COVER:

- One piece anodized aluminum reflector designed for the best light efficiency.
- Heat and impact resistant tempered clear borosilicate glass lens.

LAMP:


- HID lamps will have medium base (E26) porcelain socket with screw shell and center contact.
- Compact fluorescent double twin tube or triple tube option available.
- Lamp included

ELECTRICAL:

- Electronic fluorescent lamp units have four-pin socket, UL approved. Uses a 120-277V 60Hz, type-1 outdoor, sound rate A and high power factor ballast.
- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system. 35W HPS 120V normal ballast factor only.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant.

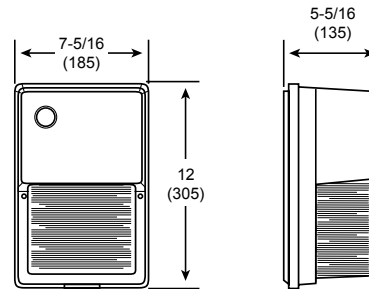

Specifications: MWP5

Height: 12 (305)
Width: 7-5/16 (185)
Depth: 5-5/16 (135)

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: MWP5-M100-120-BZ

MODEL	LAMP TYPE				VOLTAGE	
MWP5	113	(1) CF13 DTT, 4-Pin	M35	35W Metal Halide ¹	120	120V
	213	(2) CF13 DTT, 4-Pin	M50	50W Metal Halide	208	208V
	118	(1) CF18 DTT, 4-Pin	M70	70W Metal Halide	240	240V
	218	(2) CF18 DTT, 4-Pin	M100	100W Metal Halide	277	277V
	126	(1) CF26 DTT, 4-Pin	H35	35W High Pressure Sodium ¹	QT	120/208/240/277V
	226	(2) CF26 DTT, 4-Pin	H50	50W High Pressure Sodium ¹	UNV	120-277V ²
	126T	(1) CF26 TRT, 4-Pin	H70	70W High Pressure Sodium		
	132T	(1) CF32 TRT, 4-Pin	H100	100W High Pressure Sodium		
	142T	(1) CF42 TRT, 4-Pin				
FINISH			OPTIONS			
BZ	Dark Bronze (Std.)		F1	Single Fuse (120, 277 or 347V only) ³		
WH	White		F2	Double Fuse (208, 240 or 480V only) ³		
BK	Black		PC1	With Photocell - Button Type 120V		
	Available custom color (RAL) Please provide us with the RAL number.		PC2	With Photocell - Button Type 277V		
			NPC	Without Photocell - button type		

NOTES:

1. 120V only.
2. Multi-voltage ballast for compact fluorescent (120-277V).
3. Must specify voltage.