




PGRC

Project Name:	
Type:	

DISCONTINUED



Contractor Friendly Mounting Bracket

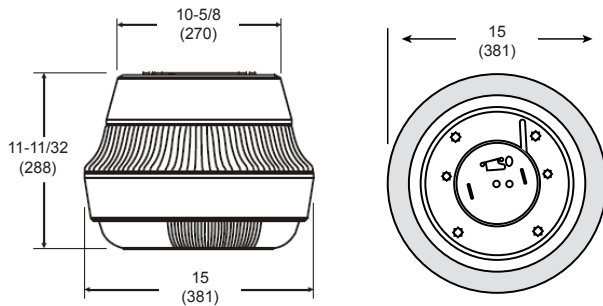

Specifications: PGRC

Height: 11-11/32 (288)
Diameter: 15 (381)

All dimensions are in inches (millimeters).

APPLICATION

The parking garage round canopy luminaire provides a wide and even symmetrical light distribution. Surface or pendant mounting. Use for location of parking areas, entrances, walkways and underpasses.

FEATURES:

- Rugged die-cast aluminum housing and with one piece anodized specular aluminum designed lens.
- Die-cast aluminum housing with a white polyester powder coated finish. Other color finish also available.
- Housing has silicone gaskets to secure the seal between the lenses and the housing.
- High impact UV stabilized acrylic.

MOUNTING:

- Ceiling or pendant mount.
- Contractor friendly features for faster installation mounting system.

LENS:

- High impact UV stabilized clear prismatic acrylic lens.

LAMP:

- HID Lamps have medium base (E26 BD/ED17) porcelain socket with screw shell and center contact.
- Lamp included.

ELECTRICAL:

- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant.

ORDERING INFORMATION

EXAMPLE: PGRC-M175-QT-WH

MODEL		LAMP TYPE			LAMP SOURCE	
PGRC	M50	50W Metal Halide	H70	70W High Pressure Sodium	(Blank) PS SCWA	Standard Pulse start MH ² Super CWA Pulse Start Ballast ³
	M70	70W Metal Halide	H100	100W High Pressure Sodium		
	M100	100W Metal Halide	H150	150W High Pressure Sodium		
	M150	150W Metal Halide	242	(2) CF42 TRT, 4-Pin ¹		
	M175	175W Metal Halide				
VOTAGE		FINISH		OPTIONS		
120	120V	WH	White (Std.)	F1	Single Fuse (120, 277 or 347V only) ⁴	
208	208V					
240	240V	BZ	Dark Bronze	F2	Double Fuse (208, 240 or 480V only) ⁴	
277	277V					
347	347V	BK	Black	TR	Tamper Resistant Screw	
480	480V					
QT	120/208/240/277V	Available custom color (RAL) Please provide us with the RAL number.		PMP	Pendant Mount Plate	
UNV	120-277V ¹					
				EM	Emergency Ballast ⁵	
				ARRA	Assembled in USA for Buy American Act	

NOTES:

1. Multi-voltage ballast for compact fluorescent (120/277V).
2. Pulse start MH available on 70, 100, 150 and 175 only.
3. Super CWA available on 150 and 175 only.
4. Must specify voltage, not available with 347V and 480V.
5. Only for compact fluorescent unit. (Emergency Ballast options, see page 79).