

RHB4

Project Name:	
Type:	



APPLICATION

The LED UFO high bay is suitable for commercial, retail and institutional applications including gyms, factories, and warehouses.

FEATURES:

- Designed to replace 750W and 1000W HID while consumes 250W and 340W.
- Adjustment dial allows the fixture to meet higher ambient temperature requirements (optional).
- Hook or Conduit pendant way for different applications.
- Resistant to shock and vibration.

MOUNTING:

- Hook mount is standard. (supports pendant mounting with 3/4" threaded hub)
- 30" safety cable included as standard.

LENS:

- The standard 120° lens is clear polycarbonate.
- Condenser Lens with heat resistant and maximum output luminous flux.

LED:

- Lumileds 2835.
- Color temperature: 4000 / 5000 (K)
- Color rendering index: >70
- Life span: 50,000 hours

ELECTRICAL:

- Input voltage: 100-277Vac., 50/60Hz
- Operating temperature: -40°C to 65°C (-40°F to 149°F)
- 0-10V, 0%~100% dimming is standard.
- UL 8750 listed.
- Class 1 circuit.

LISTING:

- UL / cUL listed.
- DLC listed. ¹
- Suitable for dry, damp, wet location.
- 5 years limited warranty.

CONFIGURATIONS

Series	Input Wattage	Lumen Output (4000K)	Lumen Efficiency (4000K)	Lumen Output (5000K)	Lumen Efficiency (5000K)
RHB4	340W	54300 lm	160 lm/W	55500 lm	163 lm/W

CONFIGURATIONS (350W, 410W)

Series	Setting	System Watts	Lumen Output	Lumen Efficiency
RHB4-3SL	40%	140W	26600 lm	190 lm/W
	60%	210W	39000 lm	186 lm/W
	80%	280W	51000 lm	182 lm/W
	100%	350W	62000 lm	177 lm/W
RHB4-3SH	40%	164W	31000 lm	189 lm/W
	60%	246W	45500 lm	185 lm/W
	80%	328W	59000 lm	180 lm/W
	100%	410W	72000 lm	176 lm/W

BI-LEVEL PIR SENSOR SPECIFICATIONS

Detection angle	360°
Detection zone	Max. 60' diameter from 40' height
High mode	0-10V/ default 10V
Low mode	Off / 0-9.8V / default 1V
Operating temperature	104°F ~ 158°F (-40°C ~ 70°C)
Operating humidity	20-90%
Rating	IP66
Voltage	120/277VAC, 50/60Hz

RHB4

ORDERING INFORMATION

EXAMPLE: RHB4-340L-50K-UNV

MODEL	LED		COLOR TEMP.		VOLTAGE		LENS	
RHB4	340L	340W LED	-40K	4000K	UNV	120-277V	(Blank)	Clear 120°
			-50K	5000K (Std.)				
	3SL	140/210/280/350W LED (adjustable)	-2T	4000/5000K Field Selectable				
	3SH	164/246/328/410W LED (adjustable)						

FINISH		OPTIONS		LIGHTING CONTROL SYSTEM	
BZ	Dark Bronze RAL 8019 (Std.)	BRI823	Bi-level and daylight dimming occupancy sensor, dip switch setting ³	PPA102S	<Bluetooth> Bluetooth Powerpack (Consult factory for installation location)
GR	Gray RAL#7036	RC-100	Remote control for BRI823 ³		
WH	White RAL#9003	MSANT12VPH01	Plug-and-Play PIR Occupancy Sensor ²		
BK	Black RAL#9011	SCKxx	Safety Cable Kit (xx=50", 96", 120", 150", 192", 240")		



* Available custom color (RAL). Please provide us with the RAL number.
* Non-standard finish with extra charge.

NOTES:

- DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.
- Available with 3SL and 3SH only.
- Available with RHB4-340L only.

DIMENSIONS


Ø 24.25
(616)

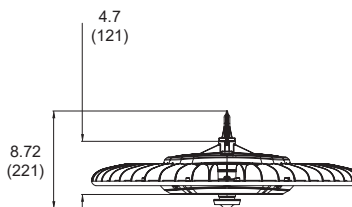


Weight: 17.57lbs

All dimensions are inches (millimeters).

MOUNTING DETAILS



Hook (standard)




3/4" pipe stem (provided by others)

RHB4

** Applies to RHB4-3SL and RHB4-3SH only.

WATTAGE SELECTABLE

This fixture has the function of adjusting the lumens output on-site.



Plug-and-Play Sensor (optional)

Sensor allows for security and energy saving.



With Sensor Port