

TWP

DISCONTINUED

Project Name:	
Type:	



APPLICATION

This compact tidy wall pack is ideal for both commercial and residential applications.

FEATURES:

- Solid aluminum construction with a matte white acrylic diffuser.
- Open bottom and enclosed top.
- Premium TGIC polyester powder coat paint, 2.5 mil nominal thickness for superior protection against fade and wear.
- Standard: Black Paint (BK), White Paint (WH).

MOUNTING:

- Supplied with a universal circular strap for a standard 4" J-box or plaster ring.

LAMP:


- One (1) 13W (2GX7) 4-pin low wattage CFL or 26W (G24q-3) 4-pin quad tube CFL lamp.
- CFL socket injection molded plastic. Lamps furnished by others.

ELECTRICAL:

- Integral electronic HPF multi-volt 120/277V (347V Canada - Except 13W), thermally protected with end-of-life circuitry to accommodate 13W or 26W lamps.

LISTING:

- UL listed standard.
- Suitable for wet location above 4' grade.
- ADA compliant.
- ARRA compliant.

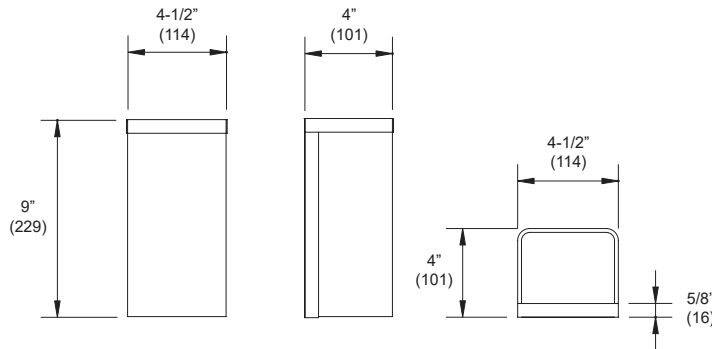

Specifications: TWP

Height: 9 (229)
Width: 4-1/2 (114)
Depth: 4 (101)

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: TWP-126-120-BK

MODEL	LAMP TYPE	VOLTAGE	FINISH	OPTIONS
TWP	113 (1) CF13 DTT, 4-Pin	UNV 120-277V	BK Black (Std.)	LP Lamps Provided (Specify Color Temperature) REM Remote EM (32°F ~ 122°F / 0°C ~ 50°C) REMCW Remote EM for Cold Weather (-4°F ~ 122°F / -20°C ~ 50°C) EMC CEC compliant EM ¹ BG Bird Guard, Stainless Steel Spikes
	118 (1) CF18 DTT, 4-Pin	120V	BZ Dark Bronze	
	126 (1) CF26 DTT, 4-Pin	277V	WH White	
* Available custom color (RAL) Please provide us with the RAL number.				

NOTES:

1. Check with factory for more details.