


UDL1

Discontinued - limited stock available



APPLICATION

The architectural wall cylinder up or down light. Ideal for walkways, building exterior walls, underpasses and accent wall sconces. Wall mounting height requires between 8 feet and 15 feet below.

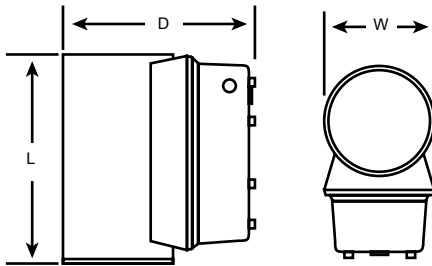

Specifications: UDL1

Length: 11 (280)
Width: 6 (152)
Depth: 10-1/4 (260)

All dimensions are in inches (millimeters).

FEATURES:

- Full cut-off dark sky compliant fixtures.
- Die-cast aluminum base with aluminum cover on which electrical components are mounted for maximum heat dissipation.
- Silicone rubber gasket between backplate and front housing for wet locations.
- Anodized aluminum reflector with high efficiency. Heat and impact resistant tempered, frost textured glass lens.
- Housing is dark bronze finish as standard. Also available in white or black finish.
- Suitable for building surface and wall mounted applications.
- One-way light (Down light) is standard (UDL1).
- Available in up and down light (UDL2).

MOUNTING:

- Wall mounting only.
- Easily installed on recessed junction boxes or direct mounts to the wall with feed thru conduit access.

LAMP:

- HID lamps have medium base (E26) porcelain socket with screw shell and center contact. UL certified socket.
- Lamp included.

ELECTRICAL:

- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant (optional).

ORDERING INFORMATION

EXAMPLE: UDL1-M70-120-BZ

MODEL		LAMP TYPE		BALLAST		DIFFUSER TYPE					
UDL1	M70	70W Metal Halide		(Blank)	Standard Pulse Start ¹	(Blank)	Heat Resistant, Tempered Clear Textured Glass Lens				
	M100	100W Metal Halide									
	M150	150W Metal Halide									
	M175	175W Metal Halide		Super CWA Pulse Start Ballast ²							
	H70	70W High Pressure Sodium									
	H100	100W High Pressure Sodium		(1) CF26 TRT, 4-Pin							
	H150	150W High Pressure Sodium									
	126T										
	132T										
	142T										
DISTRIBUTION		VOLTAGE		FINISH		OPTIONS					
(Blank)	Down light	120	120V	BZ	Dark Bronze (Std.)	F1	Single Fuse (120, 277 or 347V only) ³				
		208	208V					WH	White	F2	Double Fuse (208, 240 or 480V only) ³
		240	240V								
		277	277V					ARRA	Assembled in USA for Buy American Act		
		347	347V	Available custom color (RAL) Please provide us with the RAL number.							
		480	480V								
		QT	120/208 /240/277V								

NOTES:

1. For pulse start metal halide.
2. Super CWA available on 150 and 175 only.
3. Must specify voltage.