



Discontinued - limited stock available

UDL2

APPLICATION

The architectural wall cylinder up and down light. Ideal for walkways, building exterior walls, underpasses and accent wall sconces. Wall mounting height requires between 8 feet and 15 feet below.

FEATURES:

- Die-cast aluminum base with aluminum cover on which electrical components are mounted for maximum heat dissipation.
- Silicone rubber gasket between backplate and front housing for wet locations.
- Anodized aluminum reflector with high efficiency. Heat and impact resistant tempered, frost textured glass lens.
- Housing is dark bronze finish as standard. Also available in white or black finish.
- Suitable for building surface and wall mounted applications.
- Standard distribution - up and down light (UDL2).
- Available one-way light (UDL1).

MOUNTING:

- Wall mounting only.
- Easily installed on recessed junction boxes or direct mounts to the wall with feed thru conduit access.

LAMP:


- HID lamps have medium base (E26) porcelain socket with screw shell and center contact. UL certified socket.
- Lamp included.

ELECTRICAL:

- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant (optional).

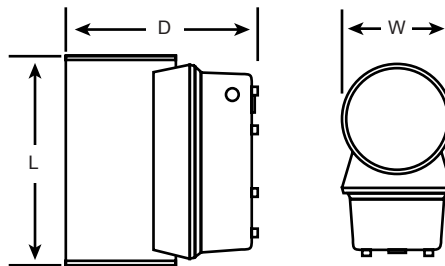

Specifications: UDL2

Length: 11 (280)
Width: 6 (152)
Depth: 10-1/4 (260)

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: UDL2-M70-120-BZ

MODEL		LAMP TYPE		BALLAST		DIFFUSER TYPE	
UDL2	M70	70W Metal Halide		(Blank) PS SCWA	Standard Pulse Start ¹ Super CWA Pulse Start Ballast ²	(Blank)	Heat Resistant, Tempered Clear Textured Glass Lens
	M100	100W Metal Halide					
	M150	150W Metal Halide					
	M175	175W Metal Halide					
	H70	70W High Pressure Sodium					
	H100	100W High Pressure Sodium					
	H150	150W High Pressure Sodium					
	126T	(1) CF26 TRT, 4-Pin					
132T	(1) CF32 TRT, 4-Pin						
142T	(1) CF42 TRT, 4-Pin						
DISTRIBUTION		VOLTAGE		FINISH		OPTIONS	
(Blank)	Up and Down light	120	120V	BZ WH BK	Dark Bronze (Std.) White Black	F1 F2 PC1 PC2 ARRA	Single Fuse (120, 277 or 347V only) ³ Double Fuse (208, 240 or 480V only) ³ With Photocell - Button Type 120V With Photocell - Button Type 277V Assembled in USA for Buy American Act
		208	208V				
		240	240V				
		277	277V				
		347	347V	Available custom color (RAL) Please provide us with the RAL number.			
		480	480V				
		QT	120/208 /240/277V				

NOTES:

1. For pulse start metal halide.
2. Super CWA available on 150 and 175 only.
3. Must specify voltage.