



UDL7 UDL7L

DISCONTINUED




Project Name:	
Type:	

APPLICATION

The quarter sphere wall sconce down light. Ideal for walkways, building exterior walls, parking areas, entrances, underpasses, loading docks and recreation areas. Wall mounting height requires between 8 feet and 15 feet below.

FEATURES:

- Full cut-off dark sky compliant fixtures.
 - Heavy duty die-cast aluminum housing on which electrical components are mounted for maximum heat dissipation.
 - Silicone rubber included to prevent leakage from the outside.
 - 5-stage polyester powder coat paint (Only applied to UDL7L with WT or FT). Architectural dark bronze finish standard. Also available in white or black finish.
 - One piece high reflectance aluminum reflector designed for full cut-off light, desired light efficiency.
- Optional:
 FT - forward throw (Type II distribution),
 WT - wide throw (Type I distribution).
- Provide downward light only.

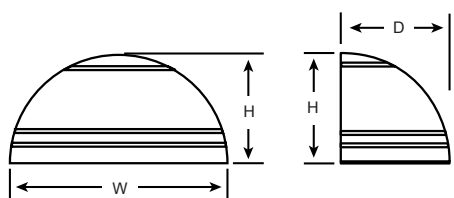

Specifications: UDL7

Height: 7-9/16 (192)
 Width: 14-15/16 (379)
 Depth: 7-29/64 (189)

Specifications: UDL7L

Height: 9-1/8 (231)
 Width: 18-3/16 (462)
 Depth: 9-1/16 (230)

All dimensions are in inches (millimeters).

LAMP CONFIGURATIONS		
	HID	DEPTH
UDL7 (Max. M100)	(1 lamp) CF26, CF32, CF42 H50 M50, M70, M100, H70, H100 12LED (21W, Min. 1050 Lumen)	UNV 120V 208V, 240V, 277V, QT UNV
UDL7L (Max. M175)	(1 lamp) CFL42 M70, M100, M150, M175, H70, H100, H150 33LED (50W, Min. 3800 Lumen)	UNV 120V, 208V, 240V, 277V, QT UNV

ORDERING INFORMATION

EXAMPLE: UDL7L-M175-QT-BZ

MODEL	LAMP TYPE			BALLAST			
UDL7	M50	50W Metal Halide	126T	(Blank) PS SCWA Standard Pulse Start ⁴ Super CWA Pulse Start Ballast ⁵			
UDL7L	M70	70W Metal Halide	226T				
	M100	100W Metal Halide	132T				
	M150	150W Metal Halide	232T				
	M175	175W Metal Halide	142T				
			242T				
	H50	50W High Pressure Sodium ¹	12LED	21W LED Input Power ³			
	H70	70W High Pressure Sodium			33LED	50W LED Input Power ³	
	H100	100W High Pressure Sodium					5000K Color Temperature (Std.)
	H150	150W High Pressure Sodium					
DISTRIBUTION	VOLTAGE		FINISH	OPTIONS			
(Blank)	Full Cut-off (Std.)	120 120V 208 208V 240 240V 277 277V QT 120/208/240/277V UNV 120-277V ³	BZ Dark Bronze (Std.) WH White BK Black Available custom color (RAL) Please provide us with the RAL number.	F1 Single Fuse (120, 277 or 347V only) ⁶ F2 Double Fuse (208, 240 or 480V only) ⁶ PC1 With Photocell - Button Type 120V ² PC2 With Photocell - Button Type 277V EM Emergency Ballast ⁷ ARRA Assembled in USA for Buy American Act			

NOTES:

1. 120V only.
2. Only available in UDL7L.
3. Multi-voltage for compact fluorescent and LED (120-277V).
4. Pulse start metal halide available on 70, 100, 150 and 175 only.
5. Super CWA available on 150 and 175 only.

6. Must specify voltage.
7. Only for compact fluorescent unit. (Emergency Ballast options, see page 79). Not available with UDL7.

REFLECTOR & COVER:

- High efficiency anodized aluminum reflector with wide beam spread.
- Heat and impact resistant tempered clear glass lens.

LAMP:

- HID lamps have medium base (E26) porcelain socket with screw shell and center contact. UL certified socket.
- Compact fluorescent lamps have 4-pin socket (GX24).
- Lamp included.

ELECTRICAL:

- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system.
- Compact fluorescent uses a high power factor electronic ballast, multi-voltage (120-277V), sound rate A, thermoplastic sockets.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant (optional).