

VETA2

Project Name:	
Type:	



APPLICATION

VETA LED luminaire is a pendant/wall offering a unique design. The ultra-thin semitransparent diffuser precisely controls optimal direct and indirect distributions and provides both efficiency and design statement to any space. A field adjustable color temperature suits perfect design for any commercial, general office, banking, retails and educational environments.

FEATURES:

- Extruded aluminum housing.
- Field adjustable CCT is standard.
- Field adjustable wattage on 3/4FT.

MOUNTING:

- Pendant mount.
- Wall / Surface mount.

LED:

- High quality array LEDs.
- Color Rendering Index: >90
- Field adjustable color temperature: 3000/3500/4000(K)

FINISH:

- White finish.

ELECTRICAL:

- 1-10V dimming standard.
- 120-277V, 50/60Hz
- Power Factor: >0.90
- THD: <20%
- Factory pre-wired for individual mount.

LISTING:

- UL listed.
- Suitable for damp location.
- 5 years warranty.

CONFIGURATIONS

Series	Size	Model #	AC Input	Lumen Output (30/35/40K)	Lumen Efficiency (30/35/40K)
VETA2	2FT	20LED	20W	2513 lm	100 lm/W
	3FT	3S	20/30/40W	2509/3804/5097 lm	100 lm/W
	4FT		20/30/40W	2369/3624/4880 lm	

COMPATIBLE DIMMER SWITCH

Model #	Brand	Compatible Dimmer Switch
(Blank)	-	<Lutron> Diva DDTV

ORDERING INFORMATION

EXAMPLE: VETA2-4-3S-3T-UNV

MODEL	LENGTH	LED	COLOR TEMP.	VOLTAGE	MOUNTING
VETA2	2 2' Length	20LED 20W LED	-3T Selectable 30/35/40K	UNV 120-277V	X1-AC48 Pendant for T-bar 15/16", 48" AC cable ¹ X2-AC48 Pendant for Hard Ceiling, 48" AC cable X3-AC48 Pendant for Sloped Hard Ceiling, 48" AC cable X4-AC48 Pendant for T-bar 9/16", 48" AC cable XS-AC48 Pendant for Screw Slot Ceiling, 48" AC cable ¹ W Wall mount S Surface for drywall G1 Direct T-grid ceiling surface mount ²
	3 3' Length	3S Selectable 20/30/40W LED			
	4 4' Length				

LIGHTING CONTROL SYSTEM	
PPA102S	<Bluetooth> Bluetooth Powerpack (Consult factory for installation location)


NOTES:
1. J-box and T-grid clips are included.
2. Mounting hardware provided.

VETA2

FIELD SELECTABLE




WALL MOUNT

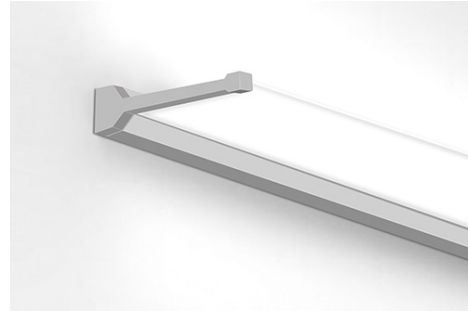

FIELD ADJUSTABLE CCT/WATT DIP SWITCH



DIMENSIONS

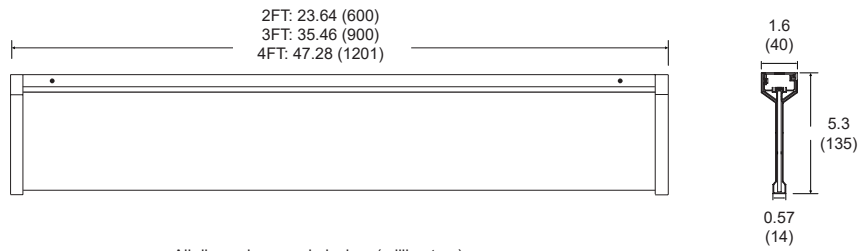

DISTRIBUTION

