

WEM-6

Project Name:

Type:

**FEATURES:**

- Corrosion-resistant 5VA flame retardant, UV-stabilized polycarbonate in gray finish.
- Sealed and gasketed housing with hinged cover.
- Sealed test switch.
- Integral breather vent.

MOUNTING:

- External mounting brackets for simplified surface mounting provided.

ELECTRICAL:

- 120/277V dual voltage operation standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (Low Voltage Disconnect) prevents battery from deep discharge.

LAMPS:

- Adjustable, glare-free PAR-Type lamp heads with 7.2 watts incandescent base lamps.
- Sealed and gasketed weather proof lamp heads with high performance chrome-plated metalized reflector and tempered glass lenses.

BATTERY:

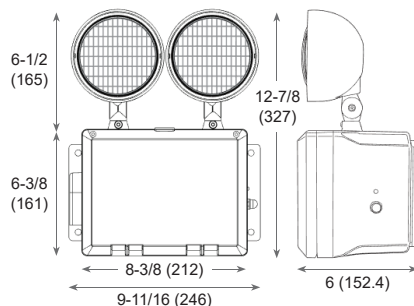
- Maintenance-free, rechargeable 6V 7.0Ah, sealed lead-acid battery on emergency (EM) units.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamps for minimum 90 minute emergency illumination.

OPTION:

- HTR: Internal heater for cold temperature (-9°C to 40°C / 15.8°F to 104°F) applications.
- RC: Remote capacity of up to 14.4W.

LISTING:

- 5 years limited warranty on materials and all electronics. Batteries are pro rated warranted for two years.
- UL listed for wet location (5°C to 40°C / 41°F to 104°F).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- ARRA and BAA compliant (optional).
- NFPA 70 compliant.

**Dimensions**

- A: Housing Width: 8-3/8 (212)
- B: Housing Height: 12-7/8 (327)
- C: Housing Depth: 6 (152.4)

All dimensions are in inches (millimeters).

ORDERING INFORMATION**EXAMPLE:** WEM-6

MODEL	HOUSING COLOR		OPTIONS	
WEM-6	(Blank)	Light Gray Housing	RC HTR ARRA	Remote Capacity Internal Heater Assembled in USA for ARRA and BAA compliant