



DISCONTINUED

APPLICATION

The full cut-off large wall pack is ideal for both commercial and residential applications with wall mounting. Use on factories, warehouses, self storage, commercial buildings, entrances, walkways and loading docks.

FEATURES:

- Heavy duty die-cast aluminum housing and hinged door frame with high impact and heat resistant borosilicate tempered glass refractor.
- Housing with 1/2" feed-through hubs provided.
- Housing has silicone rubber included to prevent and leakage from outside.
- On piece anodized specular aluminum reflector for best light efficiency.
- Dark bronze finish is standard; white or black finish is also available.

MOUNTING:

- Wall mounting only.
- Easily installs on recessed junction boxes or direct mounts to the wall with feed thru 1/2" conduit access.

REFLECTOR & COVER:

- Anodized specular aluminum reflector with high efficiency and wide beam spread.
- Heat and impact resistant tempered borosilicate glass lens.

LAMP:


- HID lamps have medium base (E26 BD/ED17) porcelain socket with screw shell and center contact.
- Lamp is included.

ELECTRICAL:

- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant.

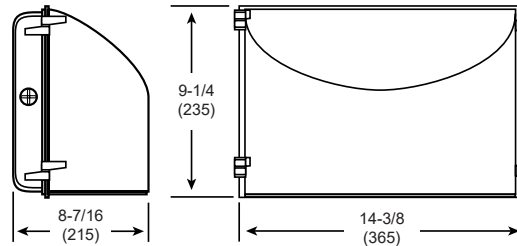

Specifications: WFC

Height: 9-1/4 (235)
 Width: 14-3/8 (365)
 Depth: 8-7/16 (215)

All dimensions are inches (millimeters).

ORDERING INFORMATION

EXAMPLE: WFC-M175PS-QT-BK

MODEL		LAMP TYPE			BALLAST	
WFC	M70	70W Metal Halide	H70	700W High Pressure Sodium	(Blank) PS SCWA	Standard Pulse Start ¹ Super CWA Pulse Start Ballast ²
	M100	100W Metal Halide	H100	100W High Pressure Sodium		
	M150	150W Metal Halide	H150	150W High Pressure Sodium		
	M175	175W Metal Halide				
VOLTAGE		FINISH			OPTIONS	
120	120V	BZ Dark Bronze (Std.) WH White BK Black Available custom color (RAL) Please provide us with the RAL number.	F1 Single Fuse (120, 277 or 347V only) ³ F2 Double Fuse (208, 240 or 480V only) ³ PC1 With Photocell - Button Type 120V PC2 With Photocell - Button Type 277V			
208	208V					
240	240V					
277	277V					
347	347V					
480	480V					
QT	120/208/240/277V					

NOTES:

1. For pulse start metal halide.
2. Super CWA available on 150 and 175 only.
3. Must specify voltage.