


WIOL

Project Name:	
Type:	

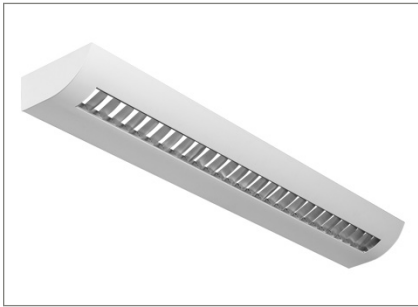

APPLICATION

Architectural indoor, direct/indirect suspended light for T5, T5HO and T8 fluorescent lamps. It creates soft and diffused lighting that ensures maximum visual comfort and balanced shadows. It can be installed individually or in a continuous line. Use for general office, bank, retail and educational environments.

FEATURES:

- Die formed 20 gauge cold-rolled steel housing. Flat steel end plate standard. Powder coated for a long life finish. White finish is standard. Die cast aluminum spade end cap optional.
- 2', 3', 4' and 8' individual fixture sections for nominal spacing of 2', 3', 4' and 8'. Using 2', 3', 4' and 8' sections can be joined to form longer length fixtures.
- Parabolic semi-specular aluminum louvers (standard) and white painted steel baffle (WBL).
- Die formed high-reflective white reflector is standard. Optional anodized specular aluminum reflector.
- Uplight and down light distribution.
- Textured matte white polyester powder paint.

MOUNTING:

- Individual installation or end-to-end row wall mount.

LAMP:


- Medium Bi-Pin twist-lock lamp sockets.
- Lamps not included.

ELECTRICAL:

- Standard ballast for T8 is high power factor instant start electronic ballast, sound rate A, minimum starting temperature 0°F (-18°C), <10% THD, and input voltage ranges of 120 to 277 volts.
- Standard ballast for T5 or T5HO is high power factor programmed start electronic ballast, sound rate A, minimum starting temperature 0°F (-18°C), <10% THD, and input voltage ranges of 120 to 277 volts.
- Ballast disconnect plug is provided as standard.

LISTING:

- UL / CUL listed.
- UL listed for dry & damp location.
- ARRA compliant.

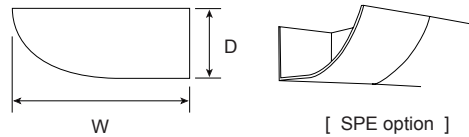

Specifications: WIOL 2', 3', 4', 8'

Length: 24, 36, 48, 96 (610 / 914 / 1220 / 2439)
 Width: 7-1/4 (184)
 Depth: 3 (76)
 Weight: WIOL-R2: 14.18 lbs (6.43 kg)
 WIOL-R3: 19.71 lbs (8.94 kg)
 WIOL-R4: 26.76 lbs (12.14 kg)
 WIOL-R8: 49.47 lbs (22.44 kg)

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: WIOL-12-R4-232-UNV-SPE

MODEL	ROW	SECTION 1	# OF LAMPS	LAMP TYPE	LOUVER
WIOL	xx Increments Total Row Lengths	R2 2' Length R3 3' Length R4 4' Length R8 8' Length	1 2	14T5 F14T5 (22") 21T5 F21T5 (34") 28T5 F28T5 (46") 17 F17T8 (24") 25 F25T8 (36") 25T8 F25T8 (48") 28T8 F28T8 (48") 32 F32T8 (48") 24T5HO F24T5HO (22") 39T5HO F39T5HO (34") 54T5HO F54T5HO (46") <small>NOTE: "T" for tandem unit, add T. Example: WIODLP-8-T232</small>	(Blank) Semi Specular (Std.) WBL White Blade SWO Semi Specular Louver with White Acrylic Overlay

REFLECTOR		BALLAST		VOLTAGE		FINISH		OPTIONS	
(Blank) SR	White Reflector (Std.) Specular Reflector	(Blank) LBF HBF PS LPS HPS	Standard NBF T8 Instant Start (IS), or T5 Programmed Start (PS) T8 Electronic, IS, LBF T8 Electronic, IS, HBF T8 Electronic, PS, NBF T8 Electronic, PS, LBF T8/T5 Electronic, PS, HBF <small>* NBF: Normal Ballast Factor LBF: Low Ballast Factor HBF: High Ballast Factor</small>	UNV 120 277 347	120-277V (Std.) 120V 277V 347V	(Blank) AL	Matte White (Std.) Light Gray <small>* Available custom color (RAL) Please provide us with the RAL number.</small>	AB EM EMC DM GLR MS DC SPE DL	AB Switch Emergency Ballast 2 CEC compliant EM 5 Dimming Ballast 3 In Line Fuse 4 Occupancy Sensor Dust Cover Spade End Cap Damp Location Label

NOTES:

1. No need to select, if same as row length and section length.
2. Emergency Ballast options, see page 390.
3. Dimming Ballast options, see page 391.
4. Must specify voltage, not available with 347V.
5. Check with factory for more details.