Discontinued - limited stock available

WML

APPLICATION

The half moon wall sconce full cut-off down light. Ideal for walkways, building exterior walls, parking areas, entrances, underpasses and loading docks. Suitable for building surface and wall mounted applications.

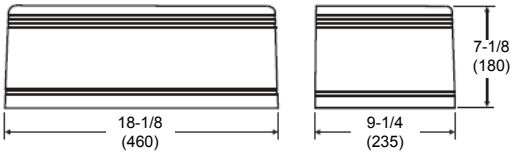

Specifications: WML

Height: 7-1/8 (180)
Width: 18-1/8 (480)
Depth: 9-1/4 (235)

FEATURES:

- Full cut-off dark sky compliant fixtures when down light options.
- Heavy duty die-cast aluminum housing on which electrical components are mounted for maximum heat dissipation.
- Silicone rubber included to prevent and leakage from the outside.
- 5-step UV resistant powder coated dark bronze finish standard.
- Also available in white or black finish.
- One piece high reflectance aluminum reflector.
- One piece high reflectance aluminum reflector designed for full cut-off light.
- Provide up and down light or down light only.

MOUNTING:

- Wall mounting only.
- Easily installed on recessed junction boxes or direct mounts to the wall with feed thru conduit access.

REFLECTOR & COVER:

- High efficiency anodized aluminum reflector with wide beam spread.
- Heat and impact resistant tempered clear glass lens.

LAMP:

- HID lamps have medium base (E26) porcelain socket with screw shell and center contact. UL certified socket.
- Compact fluorescent lamps have 4-pin socket (GX24).
- Lamp included.

ELECTRICAL:

- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system.
- Compact fluorescent uses a high power factor electronic ballast, multi-voltage (120-277V), sound rate A, thermoplastic sockets.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant.

ORDERING INFORMATION

EXAMPLE: WML-M175-WT-QT-BZ

MODEL	LAMP TYPE		BALLAST		UP/DOWN	
WML	**M50**	50W Metal Halide	**(Blank)**	Standard	**(Blank)**	Down light only
	M70	70W Metal Halide	**PS**	Pulse Start [2]	**U/D**	Up & Down light [7]
	M100	100W Metal Halide	**SCWA**	Super CWA Pulse Start Ballast [3]		
	M150	150W Metal Halide				
	M175	175W Metal Halide				
	H50	50W High Pressure Sodium [1]				
	H70	70W High Pressure Sodium				
	H100	100W High Pressure Sodium				
	H150	150W High Pressure Sodium				
	126	(1) CF26 TRT, 4-Pin				
	226	(2) CF26 TRT, 4-Pin				
	132	(1) CF32 TRT, 4-Pin				
	232	(2) CF32 TRT, 4-Pin				
	142	(1) CF42 TRT, 4-Pin				
	242	(2) CF42 TRT, 4-Pin				

DISTRIBUTION		VOLTAGE		FINISH		OPTIONS	
FT	Forward throw (Std) [4]	**120**	120V	**BZ**	Dark Bronze (Std.)	**F1**	Single Fuse (120, 277 or 347V only) [6]
WT	Wide throw [4]	**208**	208V	**WH**	White	**F2**	Double Fuse (208, 240 or 480V only) [6]
		240	240V	**BK**	Black	**PC1**	With Photocell - Button Type 120V
		277	277V		Available custom color (RAL) Please provide us with the RAL number.	**PC2**	With Photocell - Button Type 277V
		QT	120/208/ 240/277V			**EM**	Emergency Ballast [7]
		UNV	120-277V [2]				

NOTES:
1. 120V only.
2. Pulse start metal halide available on 70, 100, 150 and 175 only.
3. Super CWA available on 150 and 175 only.
4. Down light only.
5. Multi-voltage ballast for compact fluorescent (120-277V).
6. Must specify voltage.
7. Only for compact fluorescent unit and down light. (Emergency Ballast options, see page 79).

UTOPIA LIGHTING reserves the right to change specifications, drawings, dimensions without prior notice.