


WOL



APPLICATION

The full cut-off half oval wall sconce up and down light is ideal for walkways, building exterior walls, parking areas, entrances, underpasses, loading docks and recreation areas. Wall mounting height requires between 8 feet and 15 feet below.

Discontinued

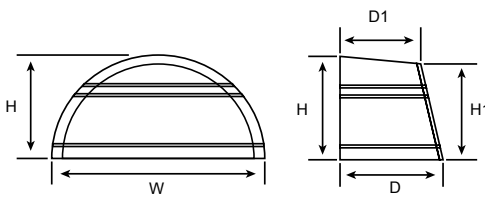

Specifications: WOL
 Height: 9-3/32 (230)
 Width: 18-1/8 (460)
 Depth: 9-3/32 (230)
 Fixture D1: 6-25/32(172)
 Fixture H1: 8-15/32(215)

All dimensions are in inches (millimeters).

FEATURES:

- Full cut-off dark sky compliant fixtures when down light options.
- Heavy duty die-cast aluminum housing on which electrical components are mounted for maximum heat dissipation.
- Silicone rubber included to prevent leakage from the outside.
- 5-step UV resistant powder coated dark bronze finish standard.
- Also available in white or black finish.
- One piece high reflectance aluminum reflector.
- One piece high reflectance aluminum reflector designed for full cut-off light.
- Provide up and down light or down light only.

MOUNTING:

- Wall mounting only.
- Easily installed on recessed junction boxes or direct mounts to the wall with feed thru conduit access.

REFLECTOR & COVER:

- High efficiency anodized aluminum reflector with wide beam spread.
- Heat and impact resistant tempered clear glass lens.

LAMP:

- HID lamps have medium base (E26) porcelain socket with screw shell and center contact. UL certified socket.
- Compact fluorescent lamps have 4-pin socket (GX24).
- Lamp included.

ELECTRICAL:

- MH ballasts are standard high power factor ballast with ambient operating temperature of -20°F (-30°C) to 108°F (90°C); 180°C insulation system.
- HPS ballasts are standard high power factor ballast with ambient operating temperature of -40°F (-40°C); 180°C insulation system.
- Compact fluorescent uses a high power factor electronic ballast, multi-voltage (120-277V), sound rate A, thermoplastic sockets.

LISTING:

- UL/CUL listed.
- Suitable for wet location.
- ARRA compliant.

ORDERING INFORMATION

EXAMPLE: WOL-M175-WT-QT-BZ

MODEL		LAMP TYPE				BALLAST			
WOL	M50	50W Metal Halide	126	(1) CF26 TRT, 4-Pin	(Blank) PS SCWA	Standard Pulse Start ² Super CWA Pulse Start Ballast ³			
	M70	70W Metal Halide	226	(2) CF26 TRT, 4-Pin					
	M100	100W Metal Halide	132	(1) CF32 TRT, 4-Pin					
	M150	150W Metal Halide	232	(2) CF32 TRT, 4-Pin					
	M175	175W Metal Halide	142	(1) CF42 TRT, 4-Pin					
			242	(2) CF42 TRT, 4-Pin					
	H50	50W High Pressure Sodium ¹							
	H70	70W High Pressure Sodium							
	H100	100W High Pressure Sodium							
	H150	150W High Pressure Sodium							
UP/DOWN		DISTRIBUTION		VOLTAGE		FINISH		OPTIONS	
(Blank)	Down light only	FT	Forward throw (Std) ⁴	120	120V	BZ	Dark Bronze (Std.)	F1	Single Fuse (120, 277 or 347V only) ⁶
U/D	Up & Down light	WT	Wide throw ⁴	208	208V	WH	White	F2	Double Fuse (208, 240 or 480V only) ⁶
				240	240V	BK	Black	PC1	With Photocell - Button Type 120V
				277	277V			PC2	With Photocell - Button Type 277V
				QT	120/208 /240/277V			EM	Emergency Ballast ⁷
				UNV	120-277V ⁵		Available custom color (RAL) Please provide us with the RAL number.		

NOTES:
 1. 120V only.
 2. Pulse start metal halide available on 70, 100, 150 and 175 only.
 3. Super CWA available on 150 and 175 only.
 4. Down light only.

5. Multi-voltage ballast for compact fluorescent (120-277V).
 6. Must specify voltage.
 7. Only for compact fluorescent unit. (Emergency Ballast options, see page 79).