

# WRHR

**DISCONTINUED**



**FEATURES:**

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant thermoplastic housing
- Smooth chrome-plated metalized reflector with plastic lens for optimal light distribution.
- Adjustable heads with wedge base incandescent lamps provide increased center-to-center spacing.

**LISTING:**

- 5 years limited warranty.
- NFPA 70 compliant.

**MOUNTING:**

- Univeresal mounting adapter plate included. Mounts to single-gang switch box.
- Suitable for wall or ceiling mount.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.

**ELECTRICAL:**


- Powered from low voltage power source with low voltage wiring (not provided).

**COMPATIBILITY CHART**

\* Reference individual unit equipment specification sheets for remote load capacity availability.

Model	6V
EM1-HO*	V
R-16HO*	V
LEDCAEM	V
EXL-RC*	V
CXTE-RC*	V
NYDXR-27-RC	V

\* SDT versions of the fixtures are not compatible with remote heads.

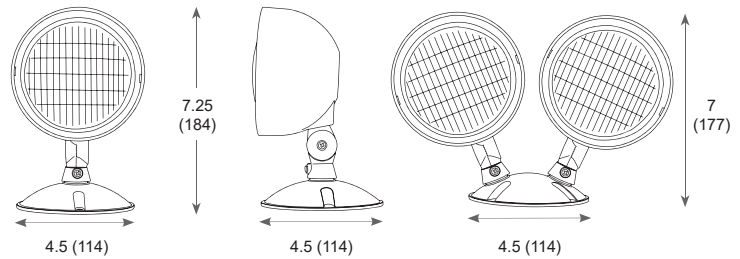

All dimensions are in inches (millimeters).

**ORDERING INFORMATION**

**EXAMPLE:** WRHR-1-WP-6V-5.4W

MODEL	HEADS	COLOR	HOUSING	VOLTAGE	WATTAGE <sup>1</sup>	
WRHR	1 Single Head 2 Double Head	(Blank) B	White Housing Black Housing	WP Weatherproof (Std)	6V 6VDC	5.4W 5.4 Watts <sup>2</sup>
					12V 12VDC	7.2W 7.2 Watts
						9W 9 Watts
						12W 12 Watts

**NOTES:**

1. Wattage rating stated per head.
2. Available in 6V units only.